

**CATALOG # : CRXS-VR : 6" or 8" Vandal Resistant Kit (OVER C-SERIES)**

## SAVE THESE INSTRUCTIONS

Keep these instructions in a safe place for future use/reference.

**Important:** Please read and understand all instructions completely before installing this fixture.

**WARNING:** Fixture installation (and use) and all electrical connections must be in accordance with local and National Electrical Codes (N.E.C.) rules, regulations and standards. If you are unfamiliar with installing fixture(s), accessories and/or electrical wiring have a qualified licensed electrician install this fixture for you. Fixture should be installed by a qualified electrician.

**WARNING: RISK OF SHOCK.** House electric current can cause painful shock or serious injury.

**WARNING:** Always disconnect power before fixture installation, wiring, or maintenance.

**WARNING:** Before starting the wire connections, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse panel. Turning the power off using the light switch is not sufficient to prevent electrical shock.

This luminaire must be connected with supply wire/conductors rated at 90°C. Most dwellings built before 1985 have supply wire rated at 60°C; consult a qualified electrician before installing.

**WARNING:** Before service insure fixture is cool to touch.

**WARNING:** Check fixture for input voltage before connecting power to fixture.

**WARNING: RISK OF SHOCK.** This fixture is suitable for dry and damp locations. Also for use with covered ceiling mount.

**WARNING:** Do not install any fixture or assembly (etc.) closer than 6" from any curtain, or similar combustible material.


Fixture must be installed on a circuit protected by Ground Fault Circuit Interrupter (GFCI).

Install LED fixture(s)/LED driver(s) only on their own circuit. Do not mix any other products (Incandescent, Compact Fluorescent, H.I.D. products/fixtures, etc...) with LED fixture(s)/LED driver(s) on a single circuit.


Do not use any other electrical equipment (example: surge protector photocell, etc.) that is not (rated) for use with LED fixture(s)/LED driver(s) on the same circuit as LED fixture(s)/LED driver(s).

Install remote surge protector(s) (by others, goes on the circuit with nothing between the surge protector and the LED fixture(s)/LED driver(s)), if the fixture is not already installed with a surge protector, to help remove power surges that may harm LED fixture(s), appropriate for the installation. Periodically check and make sure that your remote surge protector(s) are in good working order.


### Components / Parts

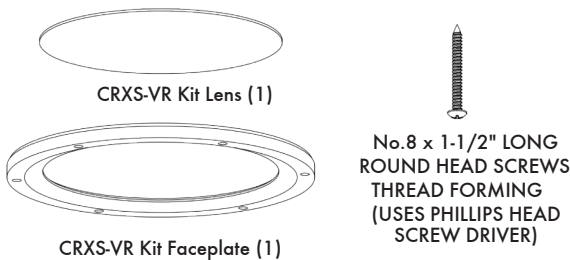

### Components Dimensions

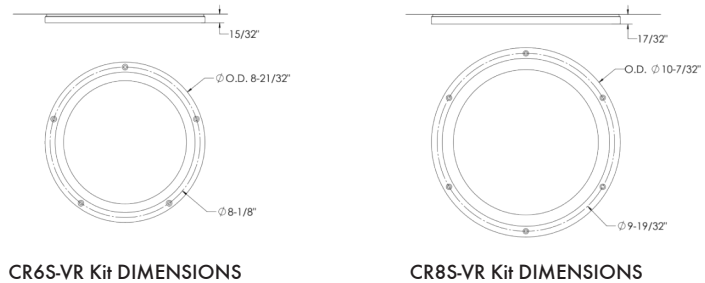

**FIG. 1**

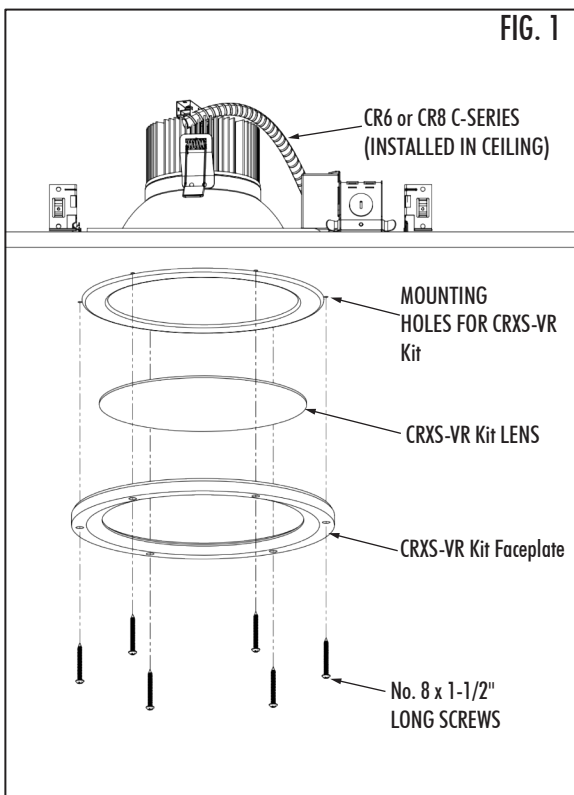

### Tools Required

- PHILLIPS HEAD SCREWDRIVER (BY OTHERS)
- Hardware (screws, nuts, etc.)
- DO NOT USE POWER TOOLS
- ONLY USE HAND TOOLS

### FIXTURE INSTALLATION

1. Position the CRXS-VR Kit faceplate against the covered ceiling and use it as a template to mark the required mounting locations (see Figure 1).
2. Install required ceiling mounting hardware (studs or other supports), as provided by others.
3. Using the supplied No. 8 screws (or alternate fasteners provided by others, if required), attach the faceplate and lens assembly to the ceiling.
4. Secure the CRXS-VR Kit faceplate and lens over the installed CR6 or CR8 C-Series housing using the appropriate screws (see Figure 1).
5. Verify that the faceplate fully covers the CR6 or CR8 housing. Tighten all screws evenly and securely. Do not overtighten.

For wiring instructions, refer to the CR6 or CR8 specifications documentation.