

A minimalist conference room with a round table and white chairs. The room is brightly lit with recessed ceiling lights and wall sconces. The walls are a light, neutral color, and the floor is a light-colored carpet. The overall aesthetic is clean and modern.

Please allow us to re-introduce ourselves!

DĀLUME[®]

by LITON

We're **going back to basics** with a renewed focus on Small-Profile Linear LED.

#1 High-Performance Small Profile Linear First!

We want every Dalume product to be **competitively priced**, have a deep set of **industry-leading options** and have **plentiful stock levels**.

#2 Pricing is getting more competitive!

You will be notified of reduced per foot pricing on select Dalume linear items to help you compete better in the linear led lighting market.

#3 Streamlined Accounting under LITON

New Dalume orders will be entered into the LITON accounting system, and the LITON Customer Service team.

#4 We Will be Expanding Options

We will be **expanding options** with new options for **Warm Dimming, Tunable White**, and **DMX Dimming**.

We know change is not easy. We will work to ensure Dalume Inc. will stay operational to assist with phased-out categories, commissions, and warranty for orders processed prior to the transition date.



Dalume Project Portfolio

EDUCATION / GOVERNMENT

- Beatrice Public Library - Nebraska
- Central Junior High - Oklahoma
- Florida State University - Florida
- Menifee City Hall - California
- Pine Grove Middle School - New York
- Pleasantview Elementary - California
- UWG Bonner Lecture Hall - Florida

HEALTHCARE

- CHUM Hospital - Canada
- Morgan State Science Center - Maryland
- Ochsner Health System - Louisiana
- Ozark Center - Missouri
- Perkins County Health - Nebraska

HOSPITALITY

- Barton Gym - New York & Florida
- Four Seasons Resort - Florida
- Hotel Alessandra - Texas
- Isle of Capri Casino - Louisiana
- Lowes Hotel - Multiple Locations
- Marriott Residence - Nationwide
- University of Southern California Fitness Center

COMMERCIAL / OFFICE

- Duke Energy - Florida
- 3M Headquarters - Minnesota
- Cisco Systems - Maryland
- Dewberry Headquarters - Maryland
- Fidelity Bank - Nationwide
- Icon Tower - New York
- Onebank - Arkansas
- Towers Watson - California
- Uber Headquarters - California

PUBLIC SPACES

- Allen County War Memorial Coliseum - Indiana
- Los Angeles Airport - California
- Louis Armstrong New Orleans International Airport - Louisiana
- Rotonda Community Center - Maryland

RESIDENTIAL


- Arlen Beach Condominiums - Florida
- Avalon Apartments - Illinois
- CIVITA Apartments - California
- Luxury Residence - Nationwide
- ONE88 Condos - Florida

RETAIL/RESTAURANT



- BCBG Retail - Nationwide
- California Pizza Kitchen - Nationwide
- Claire's Retail Stores - Nationwide
- HMS Host - Nationwide
- Honda Heritage - Ohio
- Infiniti Dealerships - Nationwide
- Porsche Dealerships - Nationwide
- Stater Brothers - Multiple Locations
- Subaru Dealerships - Missouri

Linear Overview

Surface

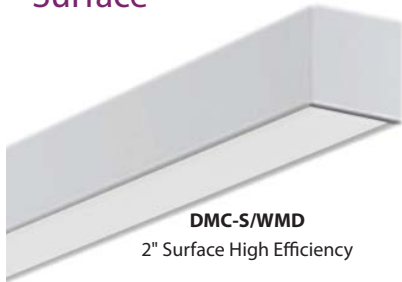

Recessed

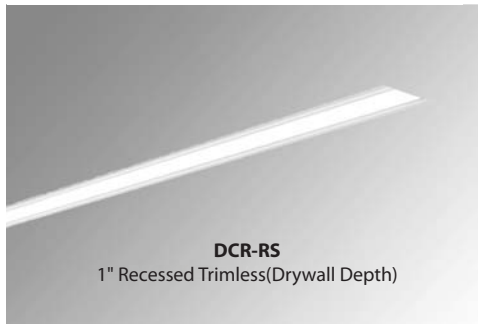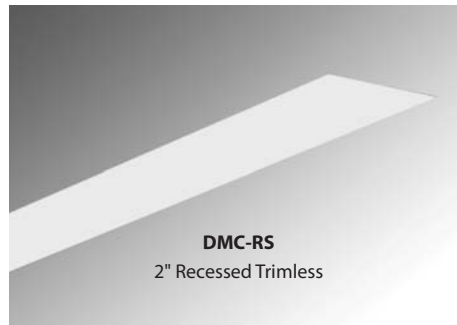

Pendant




Surface - Much better than a troffer solution





Surface/Wall Mount

2" SURFACE HIGH EFFICIENCY

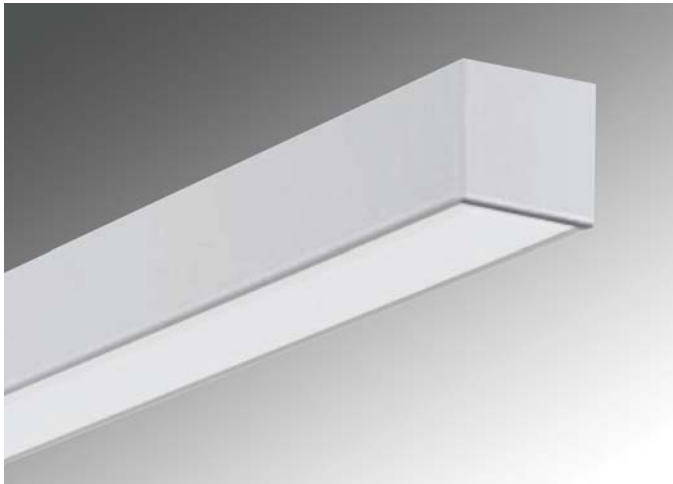

Mounting Options

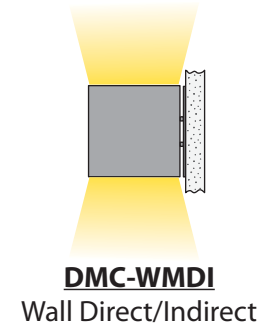

Color Temperatures




Finishes




Average Lumens & Watts

Per Foot	4'	8'
12W/900lm	48W/3600lm	96W/7200lm
18W/1300lm	72W/5200lm	144W/10,400lm

Dimensions

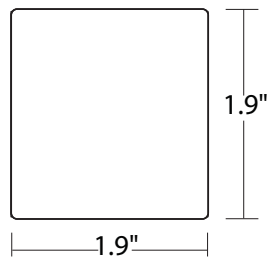

Standard



Drop Lens Options

Lengths




(Custom Lengths available)


*2700K, 5000K, RGB, Black, and RAL finishes are custom order with extended lead time.

Surface

1" SURFACE WITH WRAPPED LENS

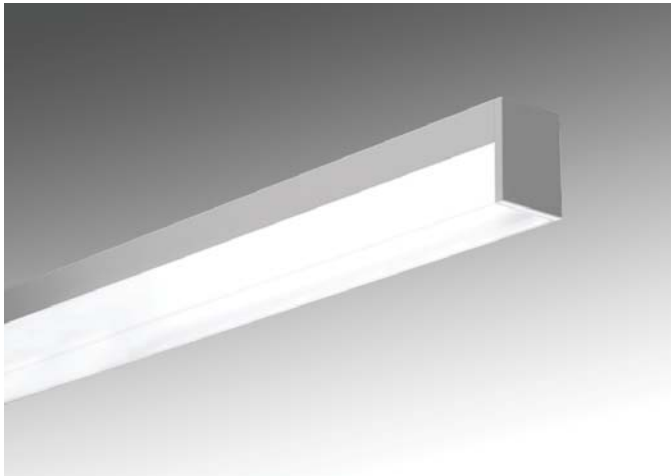

Mounting Options



DCR-SM
Surface

Color Temperatures



Finishes



Lengths




(Custom Lengths available)

Average Lumens & Watts

Per Foot	4'	8'
4W/400lm	16W/1600lm	32W/3200lm
9W/800lm	36W/3200lm	72W/6400lm
12W/1100lm	48W/4400lm	96W/8800lm

Dimensions




*2700K and 5000K are custom orders with extended lead time.

Surface

1" LINEO LINKABLE - INTEGRAL POWER



Mounting Options

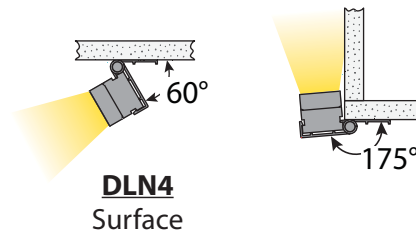

Color Temperatures




Finishes




Lengths




Accessories

DLN4A1 - White
Hardwire Box 

DLN4A1 -
Clip Set 


DLN4A2 - 6",
12", & 36" Middle
Connector 

DLN4A3-72 -
72" Plug In
Connector 

Average Lumens & Watts

1'	2'	4'
5W/500lm	10W/1000lm	20W/2000lm

Dimensions



Features

120V Integral Driver

- ▶ No Voltage Drop
- ▶ Adjustable Bracket
- ▶ On board Color Temp switch
3000K, 3500K, 4000k
- ▶ Switchable color
- ▶ Linkable
- ▶ 89.3 CRI

Ideal for Under Cabinets and Cove
as well as general illumination

Surface/T-Bar Grid




Surface/T-Bar Grid

2" SURFACE



Mounting Options

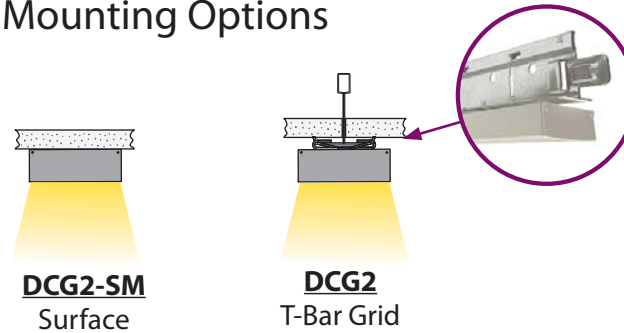

DCG2-SM
Surface

DCG2
T-Bar Grid

Color Temperatures




Finishes



Average Lumens & Watts

Per Foot	4'	8'
8W/500lm	32W/2000lm	64W/4000lm
18W/1000lm	72W/4000lm	144W/8000lm
24W/1300lm	96W/5200lm	1924W/10,400lm

Dimensions



Lengths



(Custom Lengths available)


*2700K and 5000K are custom orders with extended lead time.

Surface/T-Bar Grid

1" SURFACE



Mounting Options

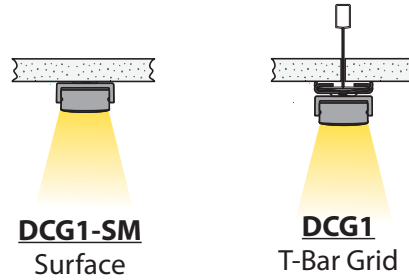

DCG1-SM
Surface

DCG1
T-Bar Grid

Color Temperatures



Finishes



Lengths




(Custom Lengths available)

Average Lumens & Watts

Per Foot	4'	8'
4W/400lm	16W/1600lm	32W/3200lm
9W/700lm	36W/2800lm	72W/5600lm
12W/1000lm	48W/4000lm	96W/8000lm

Dimensions




*2700K and 5000K are custom orders with extended lead time.

Surface/T-Bar Grid

1" GRIDLYTE PRO "CONTRACTOR FRIENDLY" - LENSED



Mounting Options

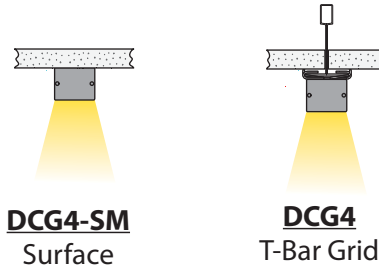

DCG4-SM
Surface

DCG4
T-Bar Grid

Color Temperatures

3500K

4000K

Average Lumens & Watts

Per Foot

4'


8W/700lm

32W/2800lm

Finishes



Dimensions



Lengths

2'

4'

Features

Uses Constant Current LEDs
vs. Constant Voltage


- ▶ Less Potential Flicker
- ▶ Better Efficiency
- ▶ Low Cost
- ▶ Quick Ship

Surface/T-Bar Grid


1" GRIDLYTE PRO "CONTRACTOR FRIENDLY" - LOW-GLARE LOUVERED



Mounting Options

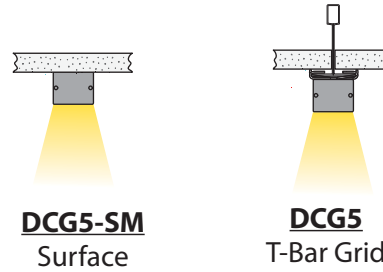

Color Temperatures



Finishes




Lengths



Average Lumens & Watts

Per Foot	4'
8W/900lm	32W/3600lm

Dimensions



Features

Uses Constant Current LEDs
vs. Constant Voltage


- ▶ Less Potential Flicker
- ▶ Better Efficiency
- ▶ Low Cost
- ▶ Low glare
- ▶ Budget friendly
- ▶ Quick Ship

Surface/T-Bar Grid


1" GRIDLYTE PRO "CONTRACTOR FRIENDLY" - WALL WASH



Mounting Options

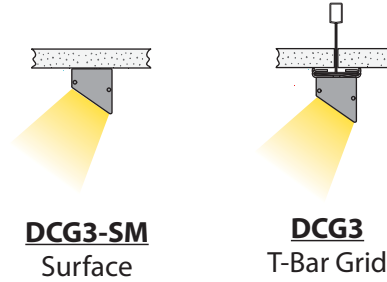

Color Temperatures



Finishes



Features


Uses Constant Current LEDs
vs. Constant Voltage

- ▶ Less Potential Flicker
- ▶ Better Efficiency
- ▶ Low Cost

Average Lumens & Watts

Per Foot	4'
8W/800lm	30W/3200lm

Dimensions




Lengths




Surface/T-Bar Grid

UNIVERSAL T-BAR CLIP

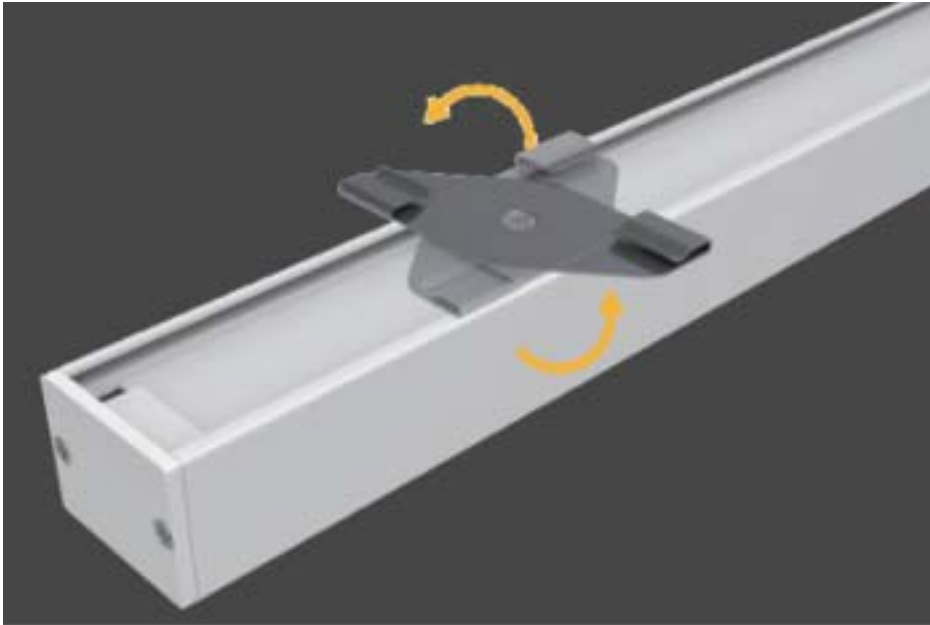


Universal T-Bar Clip can be mounted on main and mini T-Bar without tools.

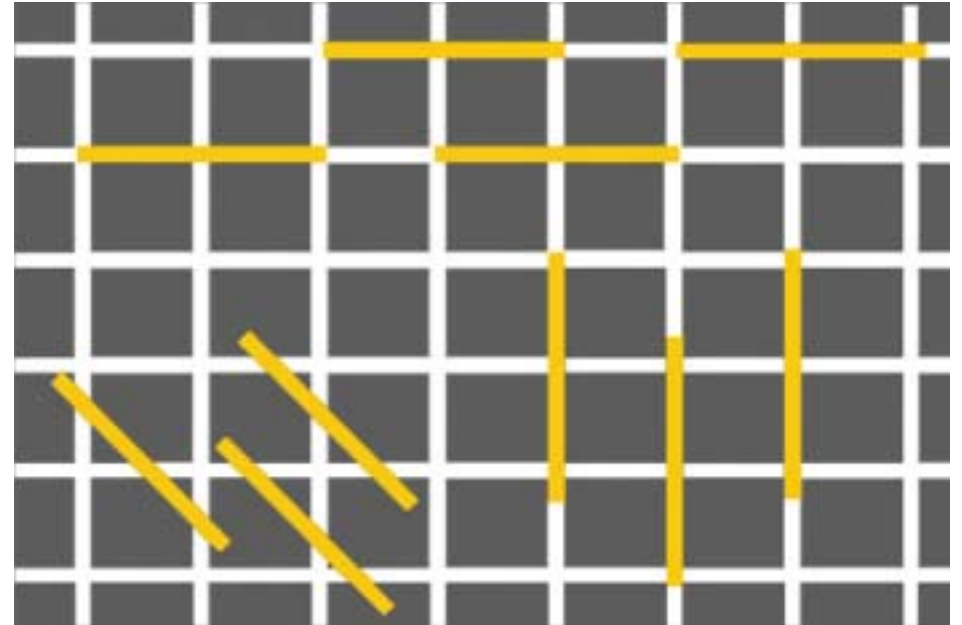


Luminaires can be mounted in various patterns to meet many design schemes.

Recessed

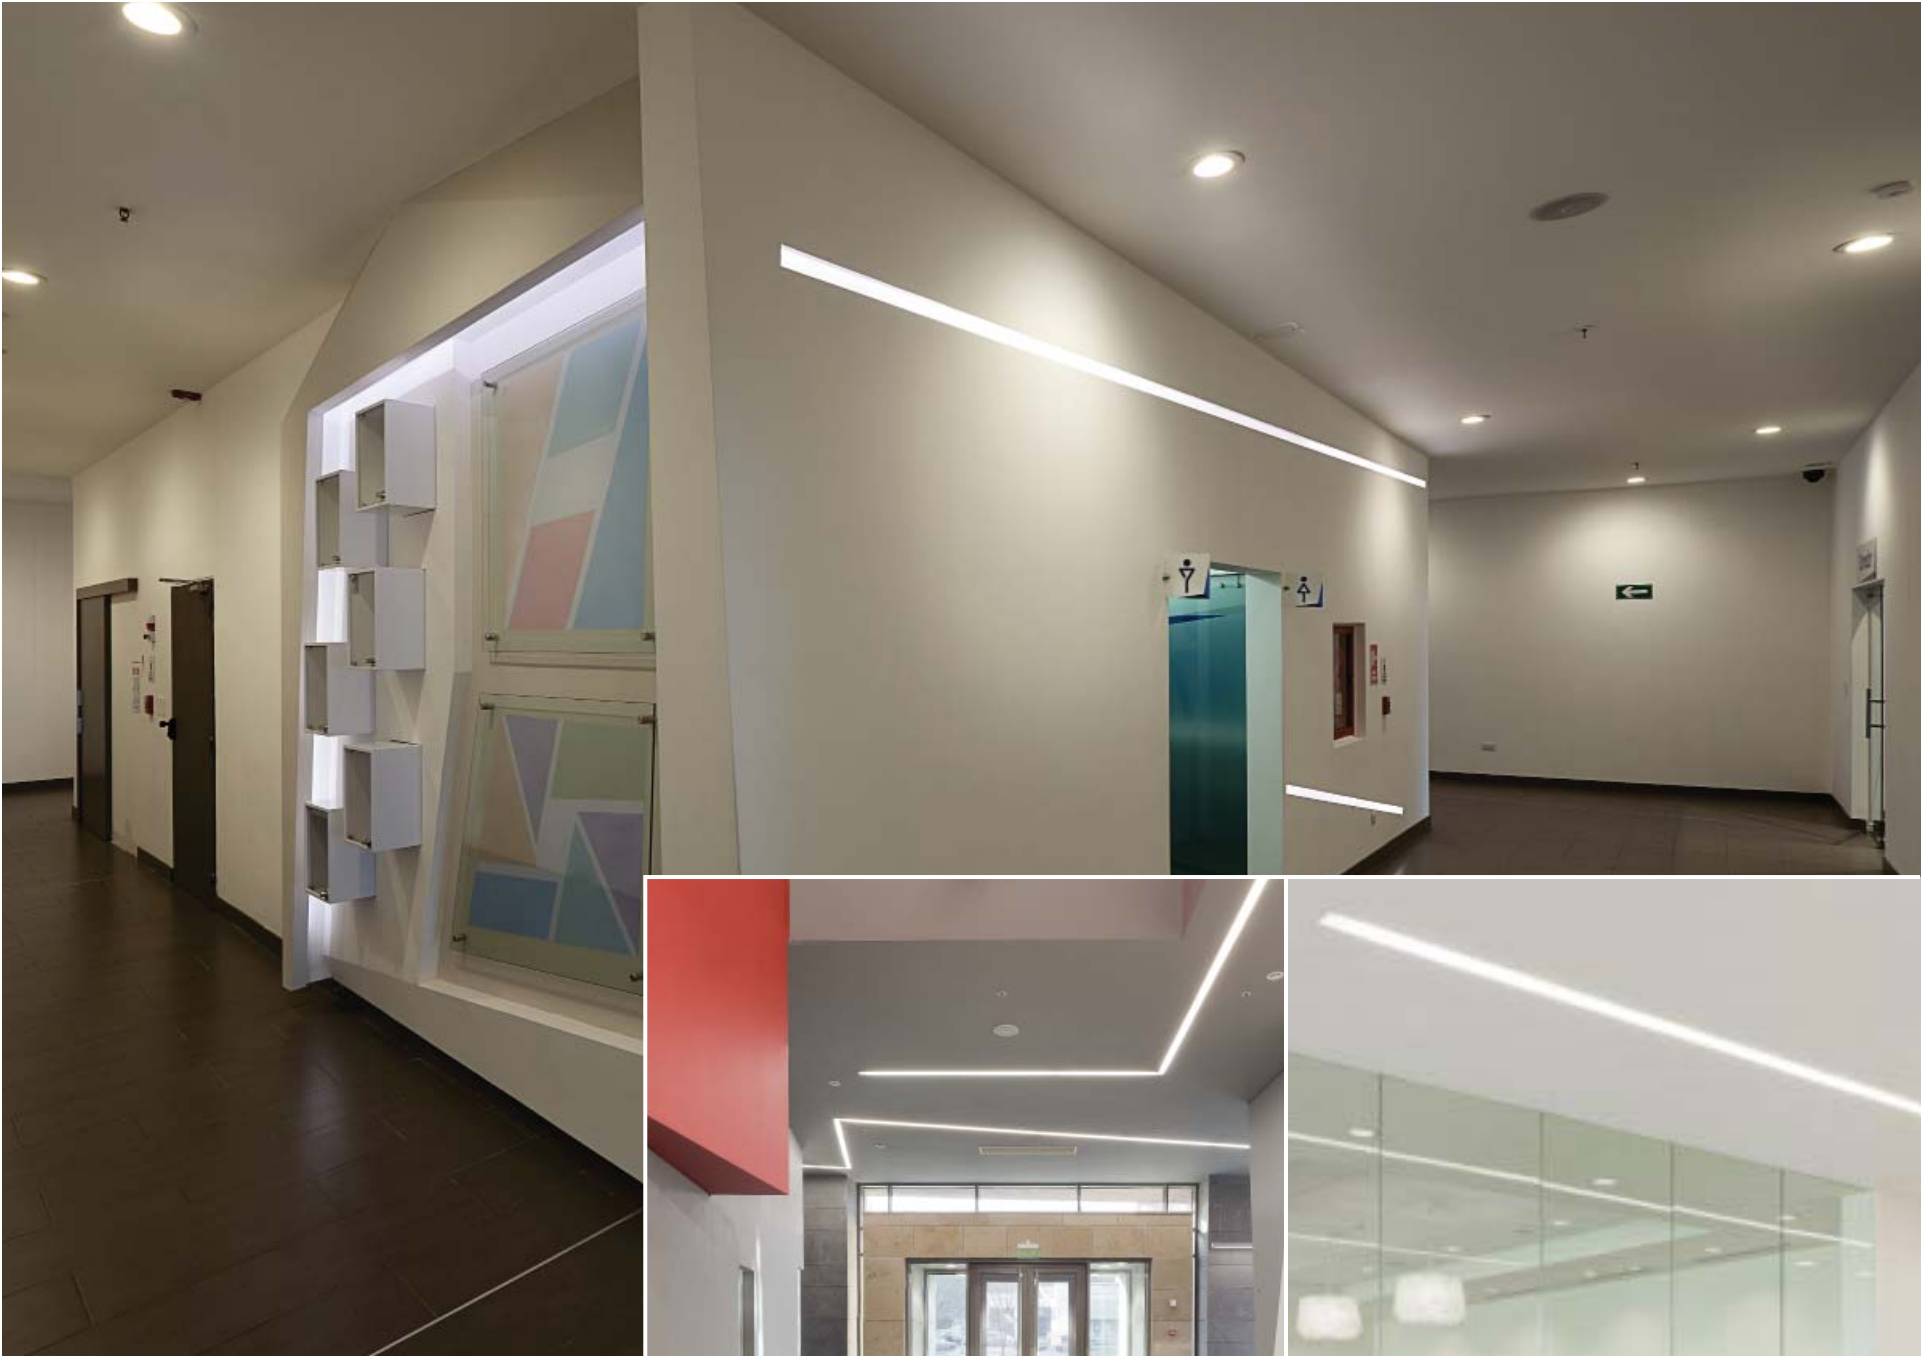


Recessed

2" RECESSED

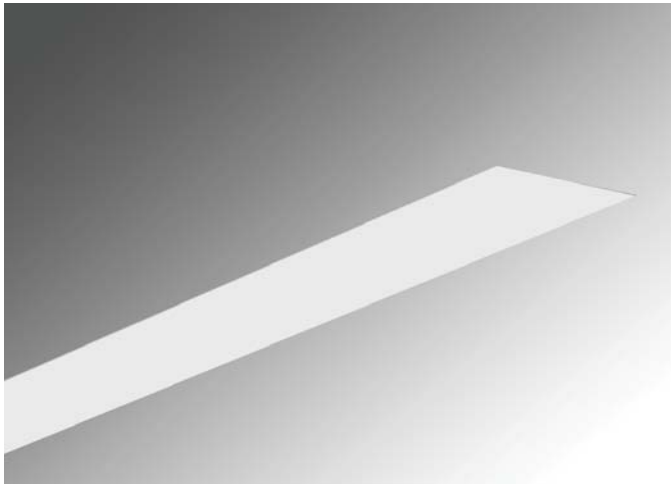

Mounting Options

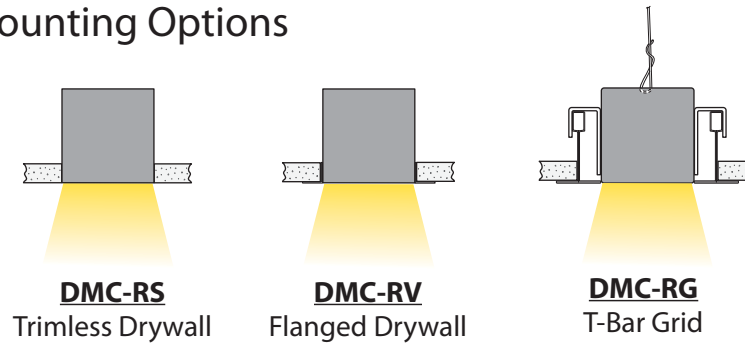

Color Temperatures



Finishes



Lengths




(Custom Lengths available)

Average Lumens & Watts

Per Foot	4'	8'
12W/800lm	48W/3200lm	96W/6400lm
18W/1300lm	72W/5200lm	144W/10,400lm

Dimensions

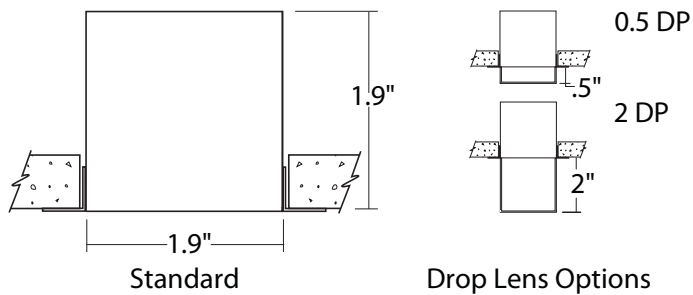


*2700K and 5000K are custom orders with extended lead time.

Recessed

1" RECESSED FLANGED



Mounting Options



DCR-RV
Flanged Drywall

Color Temperatures



Finishes



Lengths




(Custom Lengths available)


Average Lumens & Watts

Per Foot	4'	8'
4W/400lm	16W/1600lm	32W/3200lm
9W/700lm	36W/2800lm	72W/5600lm
12W/1000lm	48W/4000lm	96W/8000lm


Dimensions

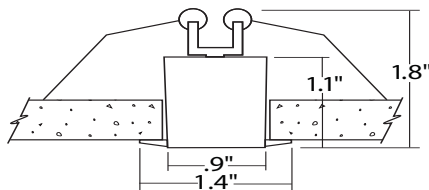


*2700K and 5000K are custom orders with extended lead time.

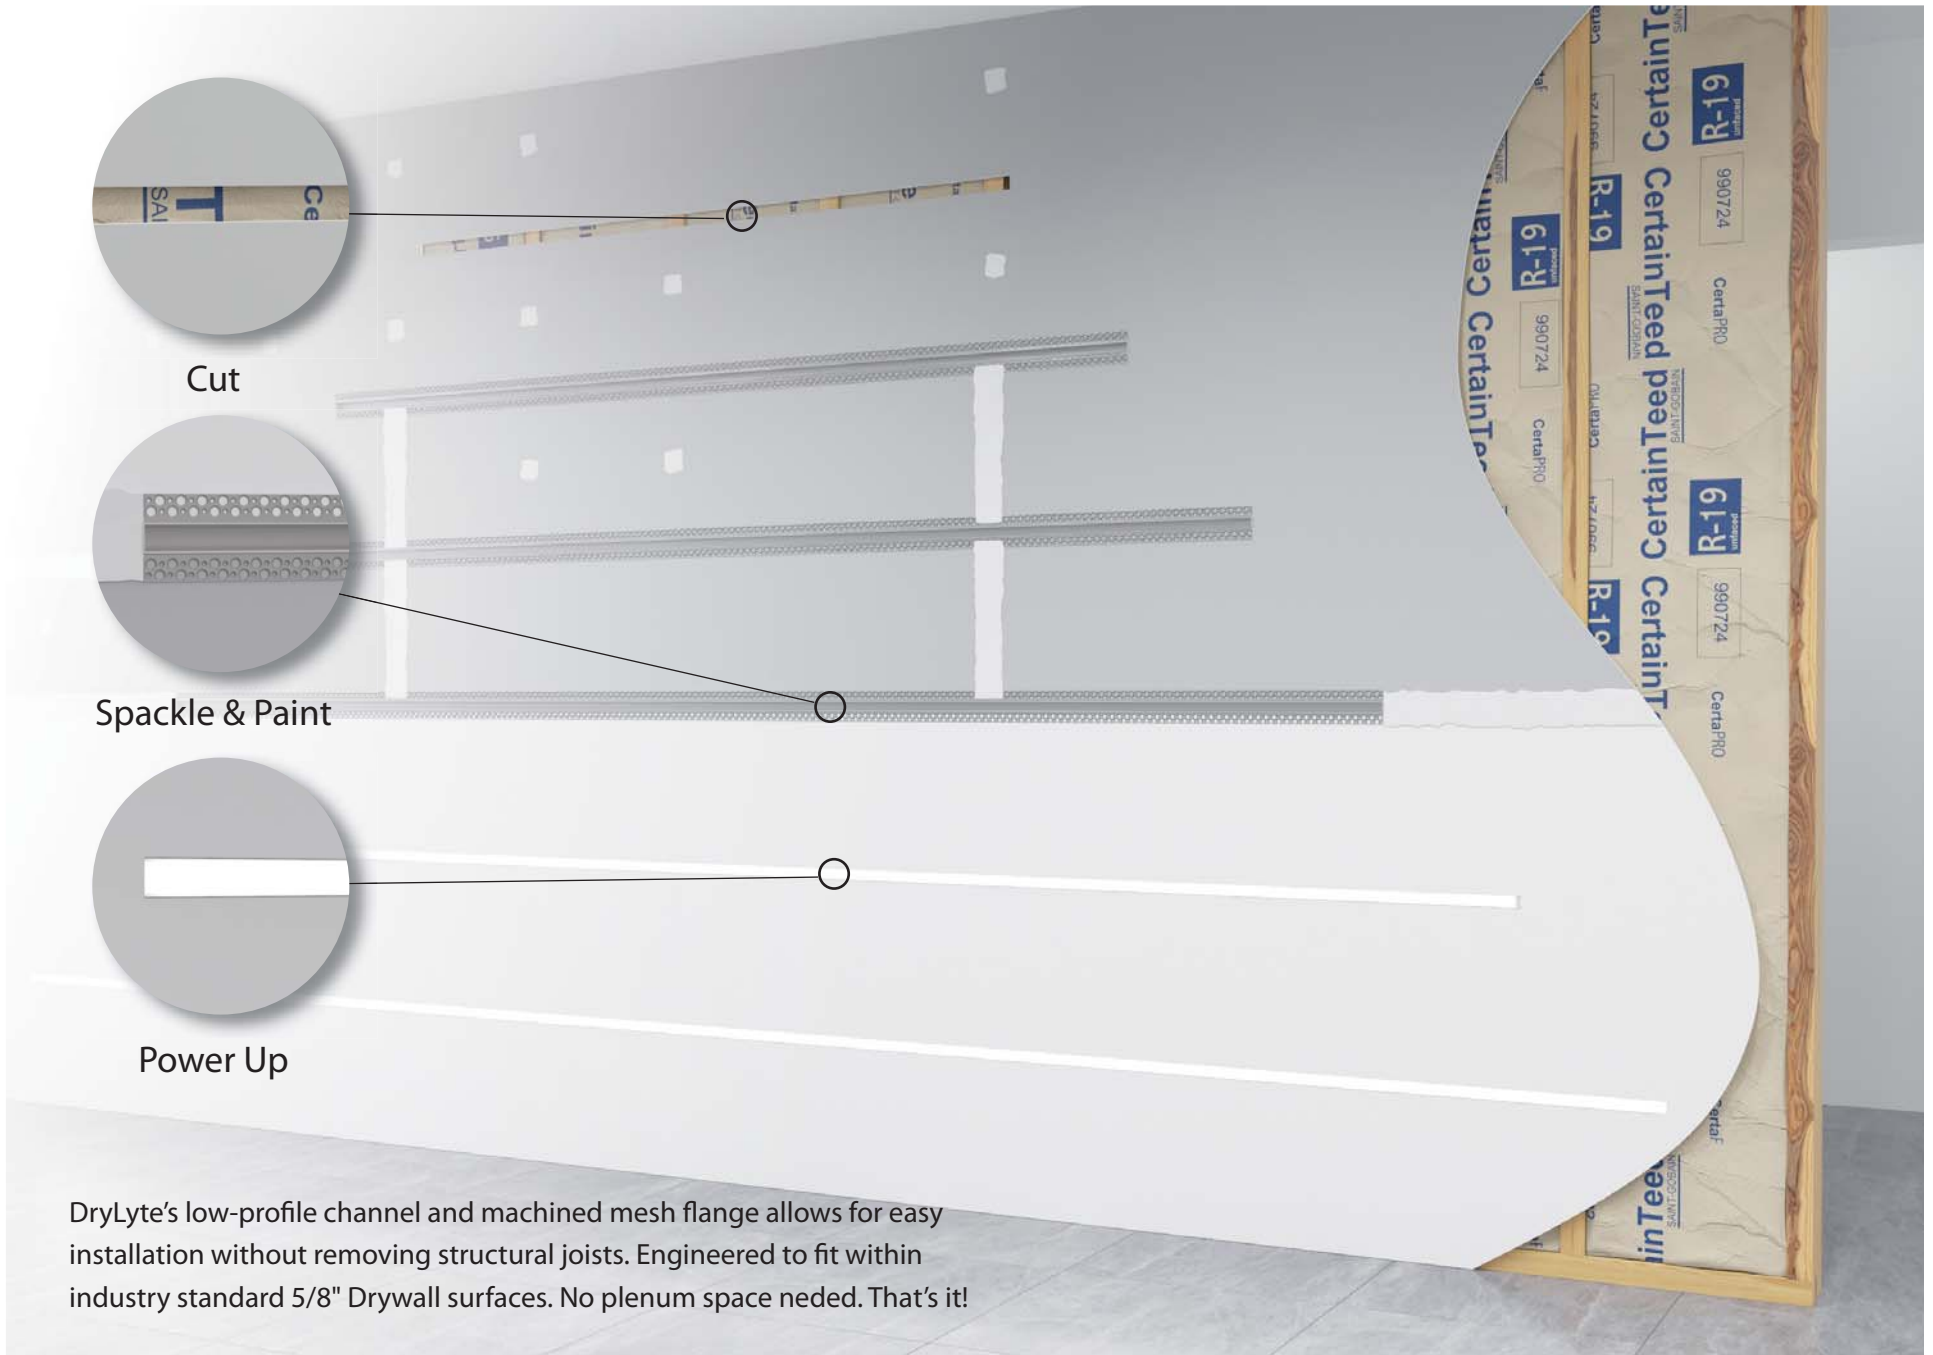

1" RECESSED TRIMLESS (DRYWALL DEPTH)

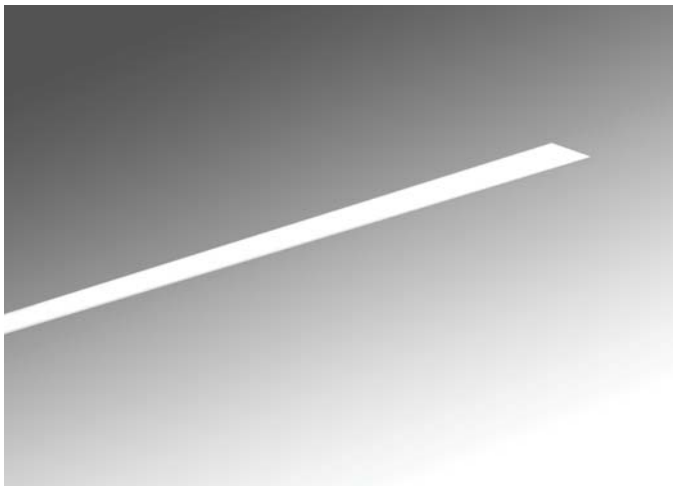

Mounting Options



DCR-RS
Trimless Drywall


Color Temperatures



Average Lumens & Watts

Per Foot	4'	8'
4W/400lm	16W/1600lm	32W/3200lm
9W/700lm	36W/2800lm	72W/5600lm
12W/1000lm	48W/4000lm	96W/8000lm

Dimensions

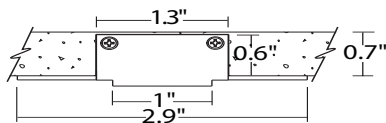

Lengths



(Custom Lengths available)

*2700K and 5000K are custom orders with extended lead time.

Pendant




Pendant

1" PENDANT WITH WRAPPED LENS



Mounting Options



DCR-D
Pendant

Color Temperatures



Finishes



Lengths




(Custom Lengths available)

Average Lumens & Watts

Per Foot	4'	8'
4W/400lm	16W/1600lm	32W/3200lm
9W/800lm	36W/3200lm	72W/6400lm
12W/1100lm	48W/4400lm	96W/8800lm

Dimensions





*2700K and 5000K are custom orders with extended lead time.

Pendant

2" PENDANT



Mounting Options



Color Temperatures



Finishes



Lengths




(Custom Lengths available)

Average Lumens & Watts

Per Foot	4'	8'
12W/900lm	48W/3600lm	96W/7200lm
18W/1300lm	72W/5200lm	144W/10,400lm

Dimensions

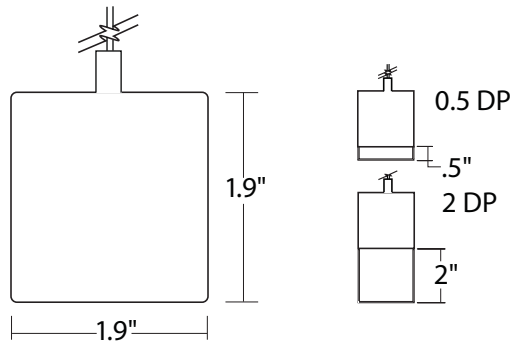

Standard

Drop Lens Options

*2700K and 5000K are custom orders with extended lead time.

Thanks for your attention!

DĀLUME[®]

by LITON

