

INSTALLATION INSTRUCTIONS — FLOATING CANOPY

TO CONSIST OF: ① CANOPY COVER WITH ONE SCREW

CAUTION: Turn off switch at main power source (fuse box) before installing any track or fittings.

Step 1. Connect the green ground wire to the green ground screw or the green wire in the junction box. (Figure 1.)

Step 2. After wires are connected, push green wire connected into junction box and attach mounting bracket to junction box by two screws. (Figure 1.)


Step 3. Locate track below junction box in desired position.

then: a.) Rotate ground clip to accept track properly and push track into clip. b.) Fasten track to ceiling following instructions supplied with the track section. (Figure 2.)

Step 4. Insert electrical adaptor into track slot and rotate 90° to locked position to make electrical contact (make sure that two contact fingers turn into the two slots in the track.) Note: a.) Center line of electrical adaptor must be set on center line of junction box b.) Polarity side on electrical adaptor (The side of two contact fingers) must point to the track polarity line (Embossed line on the surface of track) when correctly installed (Figure 2)

Step 5. Pull black wire (positive) from junction box, and attach to Brass screw terminal marked "P" (positive). Pull white wire (neutral), on opposite side of track, and attach to Chrome screw terminal marked "N" (neutral). (Figure 3.)

Step 6. Push excess wire back into junction box, wire must hug track side. Install cover and secure with screw. (Figure 3.)

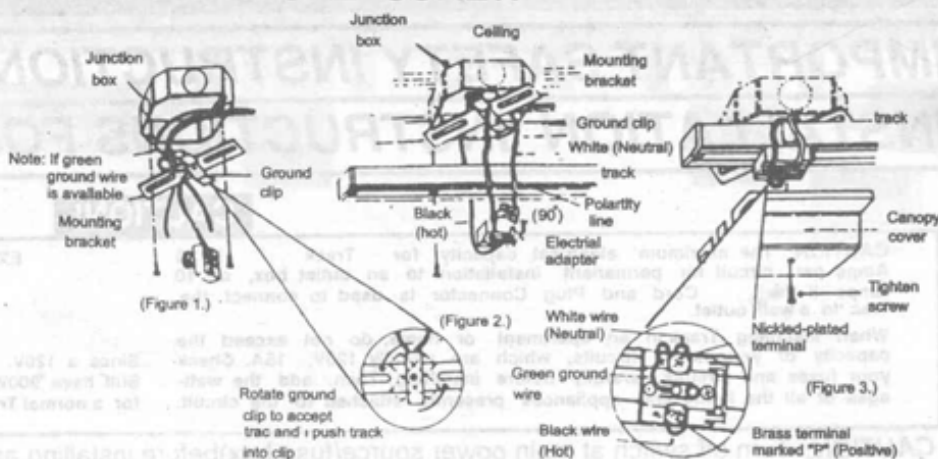

TO CONSIST OF: ② CANOPY COVER WITH TWO SCREWS

CAUTION: Turn off switch at main power source (fuse box) before installing any Track or fittings.

Step 1. Locate junction box in ceiling or on wall containing two wires, a black (Hot +) and a white (Neutral -). MAKE SURE TO SPICE WHITE TO WHITE, AND BLACK TO BLACK. Note: Connect the green ground wire in the junction box.

Step 2. After wires are connected, push wires into junction box and attach mounting bracket to junction box.

Step 3. Attach dead end connector C to Track and position Track on mounting bracket. Attach Track and position Track on mounting bracket. Attach Track to ceiling first, then tighten set screws on either side of the Track.

Step 4. Twist adapter A 90° (make sure that the two contact fingers turn into the two slots in the Track.)

Step 5. Place canopy cover B over connector and Track and attach with two screws.

Step 6. Install lampholders (see illustration on reverse side).

Step 7. Switch on main power.

