




Type :

Project :

Catalog # :

LH27R - REMODEL SHALLOW HOUSING

6" LINE VOLTAGE SHALLOW HOUSINGS

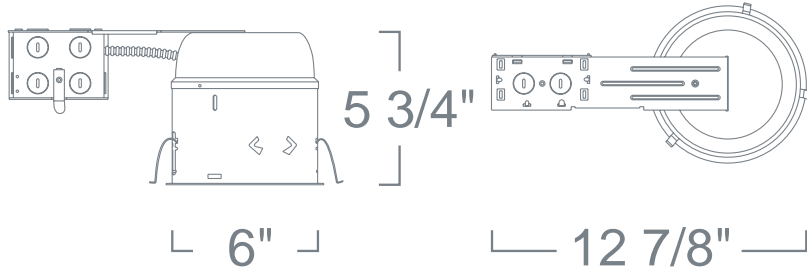

Standard: 75W PAR30/R30, 60W A19, 50W PAR16/PAR20
IC: 75W R30/PAR30, 40W A19, 50W PAR16/PAR20

FEATURE(S):



SPECIFICATION

Ceiling cut-out: 6 1/4"

120V 90W Max A19/PAR30/PAR38 MED E26

Application: General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheet rock ceiling for fast and easy installation.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with 3/4", 1" and Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: U.L. Listed, E.T.L. Listed

COMPATIBILITY

| | | |
|---|--|--|
|  LR12 SHOWER TRIM W/ ALBALITE LENS |  LR13 SHOWER TRIM W/ FRESNEL LENS |  LR30 OPEN TRIM |
|  LR330 GIMBAL RING |  LR376 ADJUSTABLE BAFFLE |  LR38 REGRESSED EYEBALL W/ BAFFLE |
|  LR383 DECO GLASS BAFFLE |  LR419 REGRESSED EYEBALL W/ REFLECTOR |  LR45 WALL WASH W/ BAFFLE |
|  LRP30 PHENOLIC PAR30 BAFFLE |  LRP40 PHENOLIC PAR38 BAFFLE |  LRS12 ALBALITE LENS W/ REFLECTOR |
|  LRS30 REFLECTOR 30 |  LRS40 REFLECTOR 38 |  LR14 SHOWER TRIM W/ FROSTED GLASS DOME |

Please see website for more compatible items.

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LH27R

| LH27R | RATING |
|-------|-----------------|
| LH27R | Blank: Standard |
| IC | :IC Airtight |