

## LH3-GU10 - STANDARD HOUSING

### 3" LINE VOLTAGE GU10 MR16 RECESSED LIGHTING




### PROJECT INFORMATION

Type :

Project :

Catalog # :

FEATURE(S):

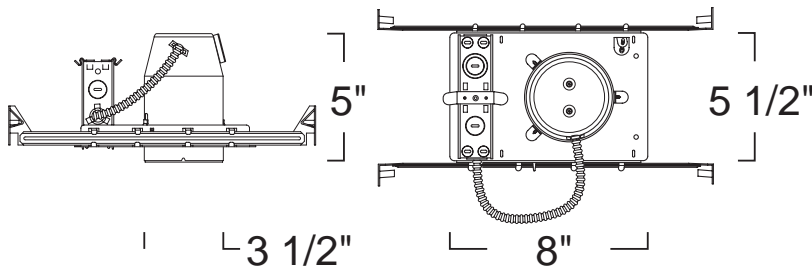

### SPECIFICATION

Ceiling cut-out: 3 7/8"

120V 50W Max MR16

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Socket:** Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation.

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** E.T.L. Listed

### COMPATIBILITY



[LR1316](#)

DECO GLASS DOME



[LR1321](#)

REFLECTOR



[LR1389](#)

ADJUSTABLE GIMBAL



[LR1393](#)

BAFFLE

Note: Wattage limitations on compatible items must be met.

### ORDERING

ORDERING EXAMPLE : LH3-GU10

**LH3-GU10**  
**LH3-GU10**

**WATTAGE**  
**Blank:50W**

**VOLTAGE**  
**Blank:120V**