

## LH3IC-GU10 - IC HOUSING

### 3" LINE VOLTAGE GU10 MR16 RECESSED LIGHTING




#### PROJECT INFORMATION

Type :

Project :

Catalog # :

#### FEATURE(S):

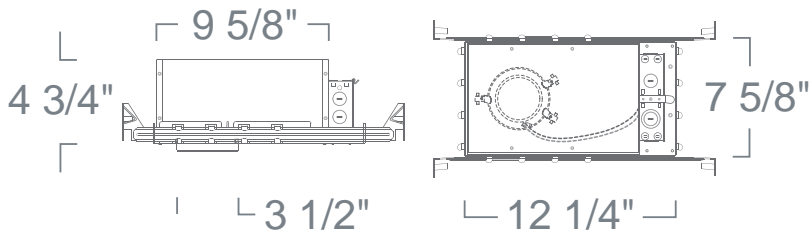

#### SPECIFICATION

120V 50W MR16 GU10

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Insulation Contact:** IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

**Label:** E.T.L. Listed

#### COMPATIBILITY



[LR1316](#)

DECO GLASS DOME



[LR1321](#)

REFLECTOR



[LR1389](#)

ADJUSTABLE GIMBAL



[LR1393](#)

BAFFLE

Note: Wattage limitations on compatible items must be met.

#### ORDERING

ORDERING EXAMPLE : LH3IC-GU10

LH3IC-GU10

RATING

LH3IC-GU10

**Blank:**Standard  
**A** :Airtight