

LH3R-GU10 - REMODEL HOUSING

3" LINE VOLTAGE GU10 MR16 RECESSED LIGHTING




PROJECT INFORMATION

Type :

Project :

Catalog # :

FEATURE(S):

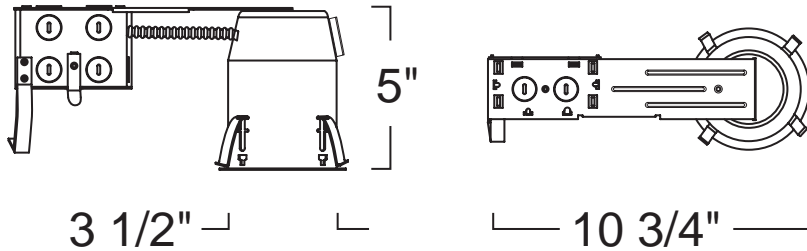

SPECIFICATION

Ceiling cut-out: 3 3/4"

120V 50W Max MR16 GU10

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheet rock ceiling for fast and easy installation.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: E.T.L. Listed

COMPATIBILITY



LR1316

DECO GLASS DOME



LR1321

REFLECTOR



LR1393

BAFFLE

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LH3R-GU10

LH3R-GU10

WATTAGE

VOLTAGE

LH3R-GU10

Blank:50W

Blank:120V