




Type :

Project :

Catalog # :

LH660 - LIGHT COMMERCIAL HOUSING

LH660 SERIES - 6" LIGHT COMMERCIAL INCANDESCENT HOUSINGS

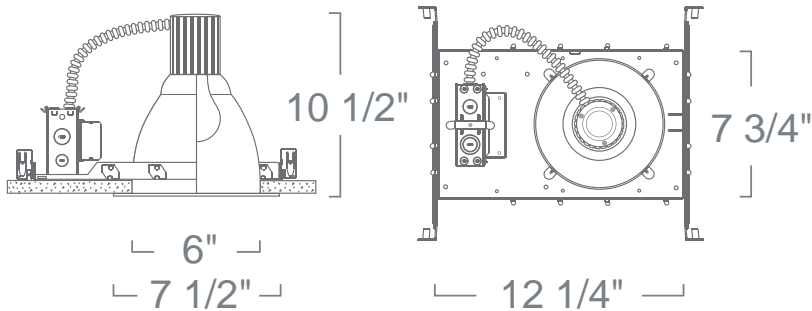

FEATURE(S):



SPECIFICATION

Ceiling cut-out: 6 1/2"

120V 150W PAR38/A19 MED E26

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing & Mounting Frame: 18 gauge galvanized flat frame with powder coat finish. Supplied with (2) 24" adjustable bar hangers (90 degrees repositioning ability). Bar hangers equipped with (nail-less installation) 3/4" serrated barbed studs for secure mounting in wood joists. Can also be mounted to grid panel ceiling. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket Cap: Extruded aluminum socket cap, 1 1/4" vertically adjustable socket arm with set screw which enables the use of multiple lamp types and repositioning to optimize lamp performance. Furnished with heat sink fins to vent lamp heat and extend lamp life. Accepts compatible reflector trims.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: U.L. Listed, E.T.L. Listed

COMPATIBILITY

 LR671 REFLECTOR	 LR677 OPEN KICK PLATE WALL WASH	 LR678 CROSS BLADE REFLECTOR
 LR680 BAFFLE W/ EYELID WALL WASH		

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LH660

LH660	WATTAGE
LH660	Blank: 150W