

## LH7RLV - REMODEL HOUSING 120V/277V

6" LOW VOLTAGE HOUSINGS




### PROJECT INFORMATION

Type :

Project :

Catalog # :

### FEATURE(S):

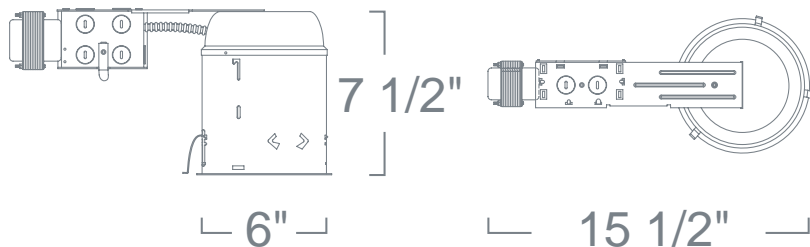

### SPECIFICATION

Ceiling cut-out: 6 1/4"

12V 75W Max MR16 GU5.3

**Housing:** Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheet rock ceiling for fast and easy installation.

**Transformer:** Class H insulated magnetic transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Junction Box:** 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation.

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** E.T.L. Listed

### COMPATIBILITY

 <b>LR2610</b> ADJUSTABLE SPOT W/ BAFFLE	 <b>LR2611</b> ADJUSTABLE SPOT W/ REFLECTOR	 <b>LR2616</b> ADJUSTABLE REFLECTOR
 <b>LR2625</b> WALL WASH W/ REFLECTOR	 <b>LR2630</b> ADJUSTABLE BAFFLE	 <b>LR2633</b> SUPER ADJUSTABLE PULL DOWN BAFFLE
 <b>LR2645</b> WALL WASH W/ BAFFLE	 <b>LR2650</b> ADJUSTABLE SLOT	 <b>LR2657</b> SUPER ADJUSTABLE PULL DOWN
 <b>LR2675</b> ADJUSTABLE PAR36 W/ BAFFLE	 <b>LR2676</b> ADJUSTABLE PAR36 W/ REFLECTOR	 <b>LR2677</b> ADJUSTABLE AR111 W/ BAFFLE
 <b>LR2678</b> ADJUSTABLE AR111 W/ REFLECTOR	 <b>LR2679</b> PINHOLE	 <b>LR2691</b> REFLECTOR W/ NARROW APERTURE

Please see website for more compatible items.  
Note: Wattage limitations on compatible items must be met.

### ORDERING

ORDERING EXAMPLE : LH7RLV

LH7RLV	RATING	WATTAGE	VOLTAGE*	ACCESSORIES
<b>LH7RLV</b>	<b>Blank:</b> Standard	<b>Blank:</b> 50W <b>-75</b> :75W	<b>Blank:</b> 120V/12V <b>-27</b> :277V/12V (Electronic*)	<b>/LBL20</b> :20W Derating <b>/LBL35</b> :35W Derating

\* Available with 120V/277V Magnetic Option, consult factory.