

LH99-GU10 - NEW CONSTRUCTION

4" LINE VOLTAGE GU10-MR16 HOUSINGS





PROJECT INFORMATION

Type :

Project :

Catalog # :

FEATURE(S):

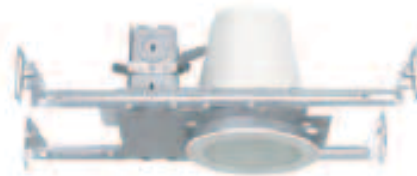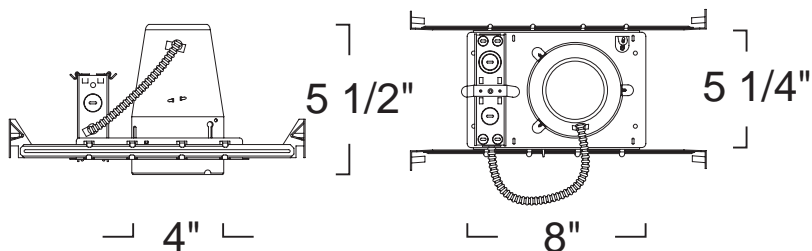

SPECIFICATION

Ceiling cut-out: 4 1/2"

120V 50W Max MR16 GU10

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Insulation Contact: Non IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: E.T.L. Listed

COMPATIBILITY

 LR1400 DECO GLASS (CONE)	 LR1409 ADJUSTABLE GIMBAL	 LR1419 PINHOLE W/ PHENOLIC BAFFLE
 LR1421 REFLECTOR	 LR1446 DECO GLASS-SHIELD (DOME)	 LR1493 METAL BAFFLE
 LR1495 WALL WASH BAFFLE		

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LH99-GU10

LH99-GU10
LH99-GU10

WATTAGE
Blank:50W

VOLTAGE
Blank:120V