




PROJECT INFORMATION

Type :

Project :

Catalog # :

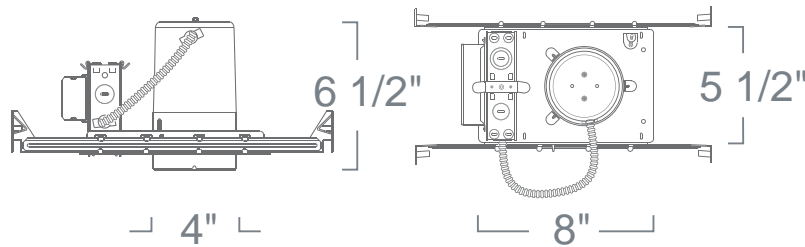

FEATURE(S):



SPECIFICATION

Ceiling cut-out: 4 1/2"

CFL 13W DTT
26W TTT

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Ballast: Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Either accepts 2-Pin lamps for use with magnetic ballast or 4-Pin lamps with electronic ballast selection.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

COMPATIBILITY

 LR922 ALBALITE TRIM	 LR923 TRIM/ FRESNEL LENS	 LR924 FROSTED DOME TRIM
 LR925 ALBALITE	 LR926 OPAL TRIM	 LR909 DEEP REFLECTOR
 LR935 EYELID WALL WASH W/ REFLECTOR	 LR942 DECO GLASS PANEL	 LR944 PHENOLIC BAFFLE NARROW APERTURE
 LR946 DECO GLASS-SHIELD (DOME)	 LR953 DECO GLASS-SHIELD (CONE)	 LR963 DECO GLASS-SHIELD (OPEN CONE)

Emergency Option: Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

Label: E.T.L. Listed

Please see website for more compatible items.

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LH99P-26-120D*

LH99P	WATTAGE + BALLAST *	OPTIONS*
LH99P	Blank :13W (Magnetic)	Blank: None
E	:13W 120V	-27 :120V/277V
-18-120D*	:18W 120V 2-Wire Dimming	-EM :Emergency
-26-120D*	:26W 120V 2-Wire Dimming	
UD	:13W 120V/277V 0-10V Dimming	
-18E	:18W	
-18UD	:18W 120V/277V 0-10V Dimming	
-26E	:26W	
-26UD	:26W 120V/277V 0-10V Dimming	

* 120D option dimmable with most incandescent or Powerline dimmers.
277V Not available for 13W Magnetic.