

LHLD2R - REMODEL L.E.D. HOUSING

2" L.E.D. HOUSINGS


PROJECT INFORMATION

Type :

Project :

Catalog # :

FEATURE(S):

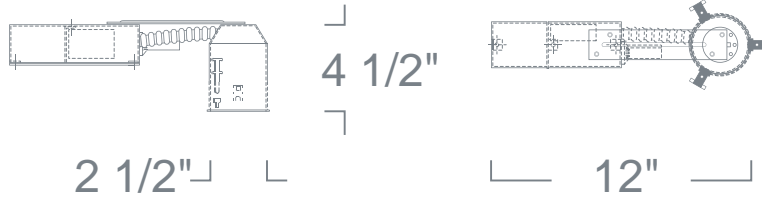

SPECIFICATION

Ceiling cut-out: 2 5/8"

L.E.D. 4W max

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheet rock ceiling for fast and easy installation.

Power Connection: LED heat sinked lamp module is replaceable via on board quick disconnect terminal. No tools required.

Driver: Electronic Direct Current LED driver integrally mounted in electric junction box.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Assembled in U.S.A.

COMPATIBILITY

 LRLD221 L.E.D. REFLECTOR	 LRLD222 WET LOCATION L.E.D. LENS	 LRLD293 L.E.D. BAFFLE
---	---	--

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LHLD2R04C35

LHLD2R	WATTAGE
LHLD2R	04C35:4W
	06C50:6W