

## LHLD2 - STANDARD L.E.D. HOUSING

### 2" L.E.D. HOUSINGS


## PROJECT INFORMATION

Type :

Project :

Catalog # :

## FEATURE(S):

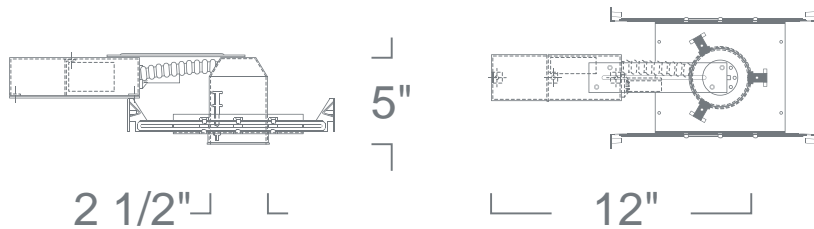

## SPECIFICATION

Ceiling cut-out: 2 13/16"

L.E.D. 4W max

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

**Housing:** Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with internal ClickLok™ locking mechanism.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Power Connection:** LED heat sinked lamp module is replaceable via on board quick disconnect terminal. No tools required.

**Driver:** Electronic Direct Current LED driver integrally mounted in electric junction box.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation.

Assembled in U.S.A.

## COMPATIBILITY

		
<b>LRLD221</b>	<b>LRLD222</b>	<b>LRLD293</b>
<b>L.E.D. REFLECTOR</b>	<b>WET LOCATION L.E.D. LENS</b>	<b>L.E.D. BAFFLE</b>

Note: Wattage limitations on compatible items must be met.

## ORDERING

ORDERING EXAMPLE : LHLD206C50

LHLD2	WATTAGE
LHLD2	<b>04C35:4W</b>
	<b>06C50:6W</b>