


LR1388 - ADJUSTABLE GIMBAL

3" LOW VOLTAGE TRIMS

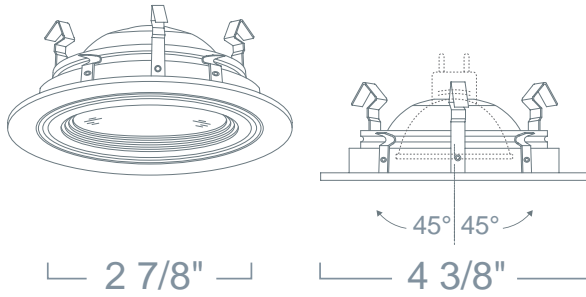

Off center pivot point allows for maximum lumen output when fully tilted.

SPECIFICATION

12V 50W Max MR16 GU5.3

Application: Provides flexibility and versatility by doubling as both a downlight and as an accent light. This trim has a larger degree of rotation resulting in both visual style and practical ergonomics.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 45° degrees vertically.

Finish: Die-Formed Construction Available in White, Black, Chrome, Gold, Natural, Copper and Mocha.

Accessories: Takes up to (2) 2" Media.

Label: U.L. Listed, E.T.L. Listed

ORDERING

LR1388	FINISH	ACCESSORIES
LR1388	W :White	/L38 :Clear Lens
	B :Black	/L39 :Red Lens
	C :Chrome	/L40 :Yellow Lens
	G :Gold	/L41 :Blue Lens
	N :Natural	/L42 :Amber Lens
	CO :Copper	/L43 :Green Lens
	MO :Mocha	/L44 :Daylight Blue Lens
		/L48 :Lens with Internal Louver Filter
		/L49 :Frosted Soft Focus
		/L50UV :UltraViolet Filter
		/L53 :Micro - Prismatic Spread Lens
		/L54 :Micro - Prismatic Spread Lens (Light Diffuse)
		/L55 :Linear Spread Lens
		/LL16B :Black
		/LL16C :Clear
		/LL16HD-B :Heavy Duty Black
		/LL16HD-C :Heavy Duty Clear

PROJECT INFORMATION

Type :

Project :

Catalog # :

FEATURE(S):



COMPATIBILITY

 LH2399 MULTILUME -2 LIGHT WHITE FINISH	 LH3399 MULTILUME -3 LIGHT WHITE FINISH	 LH4399 MULTILUME -4 LIGHT WHITE FINISH
 LH5399 MULTILUME -5 LIGHT WHITE FINISH	 LH1399 STANDARD HOUSING	 LH1399IC IC DOUBLE WALL HOUSING
 LH1399R REMODEL HOUSING	 LSH1399 SHALLOW HOUSING	 LSH1399IC SHALLOW IC HOUSING

Please see website for more compatible items.
Note: Wattage limitations on compatible items must be met.

ORDERING EXAMPLE : LR1388C