

LR1409 - ADJUSTABLE GIMBAL

4" LOW VOLTAGE TRIMS




PROJECT INFORMATION


Type :

Project :

Catalog # :

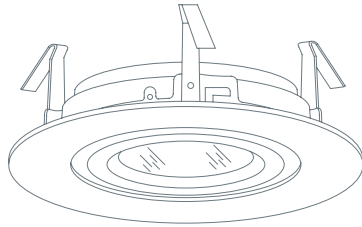

2 3/4"



5"

FEATURE(S):



SPECIFICATION

12V 75W Max MR16 GU5.3

Application: These **adjustable** fixtures provide flexibility and versatility by doubling as both a downlight and as an accent light. These trims come with adjustable lamp holders and have larger degrees of rotation resulting in both visual style and practical ergonomics.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 35° degrees vertically.

Finish *: Deep-Drawn Aluminum Construction/ Die-Formed Construction Available in White, Black, Natural and All Copper.

Accessories: Takes up to (3) 2" Media.

Label: U.L. Listed, E.T.L. Listed

COMPATIBILITY

 LH1499	 LH1499IC	 LH1499R
STANDARD HOUSING	IC DOUBLE WALL HOUSING	REMODEL HOUSING 120V/277V
 LSH1499	 LSH1499IC	 LSH1499R
SHALLOW HOUSING	SHALLOW IC HOUSING	SHALLOW REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LR1409N

LR1409	FINISH *	ACCESSORIES
LR1409	W :White	/L38 :Clear Lens
	B :Black	/L39 :Red Lens
	N :Natural	/L40 :Yellow Lens
	CO :All Copper	/L41 :Blue Lens
		/L42 :Amber Lens
		/L43 :Green Lens
		/L44 :Daylight Blue Lens
		/L48 :Lens with Internal Louver Filter
		/L49 :Frosted Soft Focus
		/L50UV :UltraViolet Filter
		/L53 :Micro - Prismatic Spread Lens
		/L54 :Micro - Prismatic Spread Lens (Light Diffuse)
		/L55 :Linear Spread Lens
		/LL16B :Black
		/LL16C :Clear
		/LL16HD-B :Heavy Duty Black
		/LL16HD-C :Heavy Duty Clear

* Finishes designated with "ALL" prior to the finish color come standard with a matching ring finish. Use "W" for White Ring.