

LR1598 - ADJUSTABLE EYEBALL W/ BAFFLE

5" LOW VOLTAGE TRIMS




PROJECT INFORMATION

Type :

Project :

Catalog # :

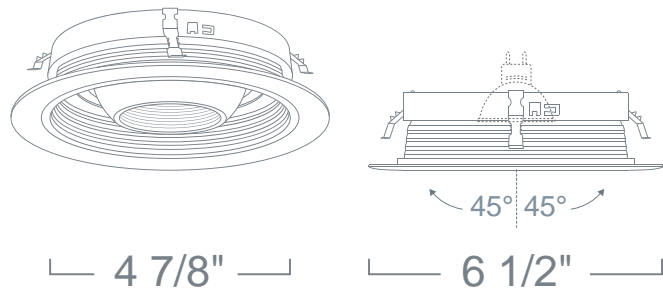

up to 35 degree rotation

FEATURE(S):



SPECIFICATION

12V 75W Max MR16 GU5.3

Application: The MR16 adjustable trim combines the aiming capabilities of a small aperture trim while maintaining appearance of the 5" trim. These trims have a large degree of rotation that allows for pinpoint illumination in an accent lighting application. The MR16 lamp has a controlled beam spread that produces the level of light intensity needed to properly highlight an object.

Mounting Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 45° degrees vertically.

Baffle Finish *: Die-formed aluminum baffle ridges eliminate stray light. Available in White and All Natural.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Gold and Natural.

Accessories: Takes (1) 2" Media.

Label: U.L. Listed, E.T.L. Listed

COMPATIBILITY



[LH1599](#)

STANDARD HOUSING



[LH1599IC](#)

IC HOUSING



[LH1599R](#)

REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LR1598W

LR1598	BAFFLE FINISH *	RING FINISH	ACCESSORIES
LR1598	W :White	Blank :White	/L38 :Clear Lens
	N :All Natural	B :Black	/L39 :Red Lens
		C :Chrome	/L40 :Yellow Lens
		G :Gold	/L41 :Blue Lens
		N :Natural	/L42 :Amber Lens
			/L43 :Green Lens
			/L44 :Daylight Blue Lens
			/L48 :Lens with Internal Louver Filter
			/L49 :Frosted Soft Focus
			/L50UV :UltraViolet Filter
			/L53 :Micro - Prismatic Spread Lens
			/L54 :Micro - Prismatic Spread Lens (Light Diffuse)
			/L55 :Linear Spread Lens
			/LL16B :Black
			/LL16C :Clear
			/LL16HD-B :Heavy Duty Black
			/LL16HD-C :Heavy Duty Clear

* Finishes designated with "ALL" prior to the finish color come standard with a matching ring finish. Use "W" for White Ring.