




PROJECT INFORMATION

Type :


Project :

Catalog # :

FEATURE(S):

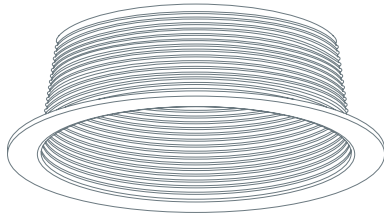

5 5/8"

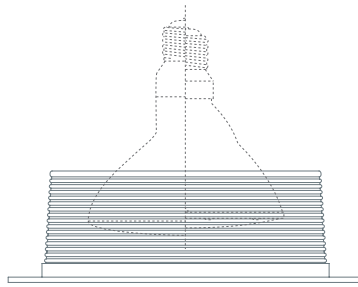

7 1/2"

SPECIFICATION

120V 150W Max R40/PAR38 MED E26

Application: Baffle downlights are used to minimize unwanted glare from the lamp source while providing a budget friendly design to provide general ambient light to an environment.

While the low reflectance level of black makes it the most effective color for baffle trims, white baffles have become the most popular option. The benefit of white baffles is that the trims blend with the ceiling when the lights are turned off. They are suitable for general illumination of residential and light commercial ceilings up to 9 feet. For a room with a typical eight-foot high ceiling, space 6" downlights apart approximately seven feet apart for general lighting applications.

Mounting Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish *: Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural, All Copper and All Mocha.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Gold, Natural, Copper and Mocha.

Label: U.L. Listed, E.T.L. Listed

Limitation: Not for use w/Shallow Housings.

COMPATIBILITY



LH7

STANDARD HOUSING



LH7IC

100W IC HOUSING ()



LH7R

REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LRM40W

LRM40	BAFFLE FINISH *	RING FINISH
LRM40	W :White	Blank :White
	B :Black	B :Black
	N :All Natural	G :Gold
	CO :All Copper	N :Natural
	MO :All Mocha	CO :Copper
		MO :Mocha

* Finishes designated with "ALL" prior to the finish color come standard with a matching ring finish. Use "W" for White Ring.