

## LSH1399 - SHALLOW HOUSING

### 3" LOW VOLTAGE HOUSINGS




## PROJECT INFORMATION

Type :

Project :

Catalog # :

### FEATURE(S):

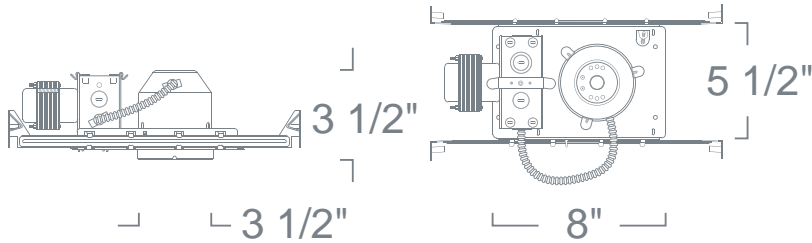

### SPECIFICATION

Ceiling cut-out: 3 7/8"

12V Out 37W Max MR16

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Transformer:** High quality insulated transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C. Available in magnetic or "noise-free" electronic.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.
















**Junction Box:** 16 gauge pre-wired galvanized steel Junction Box, 25 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (3) 3/4", (1) 1" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation.

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** E.T.L. Listed

### COMPATIBILITY

 <a href="#">LR1303</a> CROSS BLADE	 <a href="#">LR1311</a> LOUVER	 <a href="#">LR1316</a> DECO GLASS DOME
 <a href="#">LR1317</a> REFLECTOR W/ FROSTED LENS (T LAMP)	 <a href="#">LR1320</a> SLOT	 <a href="#">LR1321</a> REFLECTOR
 <a href="#">LR1342</a> REFLECTOR W/ FROSTED LENS (MR16)	 <a href="#">LR1352</a> DECO GLASS PANEL	 <a href="#">LR1353</a> DECO GLASS
 <a href="#">LR1354</a> DECO GLASS	 <a href="#">LR1356</a> DECO GLASS	 <a href="#">LR1380</a> PULL DOWN W/ SNOOT
 <a href="#">LR1381</a> PULL DOWN ADJUSTABLE REFLECTOR	 <a href="#">LR1383</a> PULL DOWN ADJUSTABLE BAFFLE	 <a href="#">LR1386</a> PULL DOWN W/ BARNDOORS

Please see website for more compatible items.

Note: Wattage limitations on compatible items must be met.

### ORDERING

ORDERING EXAMPLE : LSH1399

LSH1399	RATING	WATTAGE	VOLTAGE	ACCESSORIES
<b>LSH1399</b>	<b>Blank:</b> Non-IC Magnetic <b>E</b> : Non-IC Electronic	<b>Blank:</b> 37W	<b>Blank:</b> 120V <b>-27</b> : 277V	<b>/LBL20</b> : 20W Derating <b>/LBL35</b> : 35W Derating