

L VH61 - ARCHITECTURAL HOUSING (IC) 6" ARCHITECTURAL VERTICAL COMPACT FLUORESCENT HOUSINGS




PROJECT INFORMATION

Type :

Project :

Catalog # :

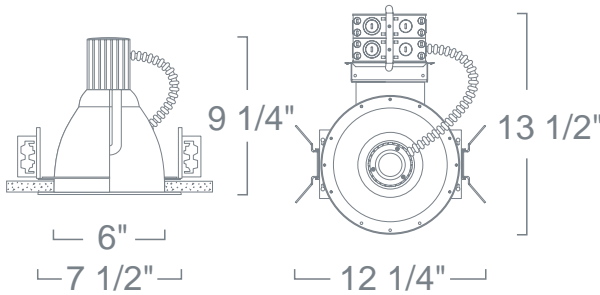

Architectoral Hanger Bars sold separately.

FEATURE(S):



SPECIFICATION

Ceiling cut-out: 6 3/4"

CFL 42W Max

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing Frame: 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceilings up to 1 1/4" thick. Triple slot bat-wing hanger brackets accommodate multiple bar hanger systems.

Mounting: Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT. 26" C-Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

Ballast: Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

Socket Cap: Extruded aluminum socket cap, 1 1/4" vertically adjustable socket arm with set screw which enables the use of multiple lamp types and repositioning to optimize lamp performance. Furnished with heat sink fins to vent lamp heat and extend lamp life. Accepts compatible reflector trims.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Either accepts 2-Pin lamps for use with magnetic ballast or 4-Pin lamps with electronic ballast selection.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

COMPATIBILITY

 C260 C-CHANNEL HANGER BAR SET	 L270 LINEAR HANGER BAR SET	 LR601 SELF-FLANGED HIZAK REFLECTOR
 LR602 REFLECTOR W/ LENS	 LR6021 REFLECTOR W/ GLASS RING	 LR603 SELF-FLANGED BAFFLED REFLECTOR
 LR604 BAFFLE W/ PRISMATIC LENS	 LR606 CROSS BLADE REFLECTOR	 LR631 REFLECTOR W/ GLASS ACCENT
 LR633 BAFFLE W/ GLASS ACCENT		

Note: Wattage limitations on compatible items must be met.

ORDERING

L VH61	WATTAGE	BALLAST	OPTIONS*
L VH61	13IC :13W IC	UD :0-10V Dimming (120V/277V)	Blank: None
	18IC :18W IC	UE :120V/277V Electronic	-EM :Emergency (Remote)
	26IC :26W IC	ADV-SM :120V/277V Smart Mate	-EMA :Emergency (Trim)
		ADV-M7 :120V/277V Mark VII Dimming	-FS :Fuse
		ADV-M10 :120V Mark X Dimming	
		LUT-HL :120V Lutron 3-Wire Dimming	
		LUT-HL-27 :277V Lutron 3-Wire Dimming	
		LUT-TW :120V Tu-wire Dimming	
		UE-347 :347V Electronic	
		E :120V Electronic	

* Orders for EMA option must be accompanied with Trim style.

ORDERING EXAMPLE : LVH61 13ICADV-M7-EMA