

## LWH6 - 1 & 2 LAMP HOUSING (2 LAMP) 6" ARCHITECTURAL HORIZONTAL CFL WALL WASH HOUSINGS




### PROJECT INFORMATION

Type :

Project :

Catalog # :

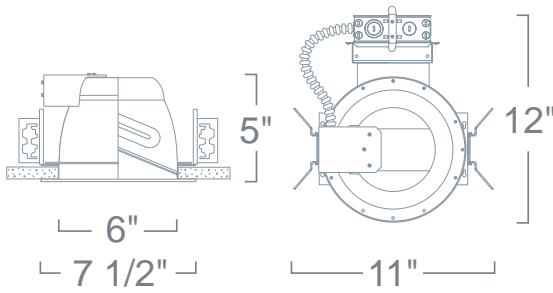

Architectural Hanger Bars sold separately.

### FEATURE(S):



### SPECIFICATION

Ceiling cut-out: 6 3/4"

CFL (1) 32W (2) 26W Max

**Application:** Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

**Housing Frame:** 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceilings up to 1 3/4" thick. Triple slot bat-wing hanger brackets accommodate multiple bar hanger systems.

**Mounting:** Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT. 26" C-Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

**Socket Cap:** Heavy-Duty steel socket enclosure with built-in ventilations. Die-cast aluminum fittings. Accepts compatible reflector trims.

**Junction Box:** 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

**Socket:** Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Either accepts 2-Pin lamps for use with magnetic ballast or 4-Pin lamps with electronic ballast selection.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation.

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

**Emergency Option:** Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

**Label:** U.L. Listed, E.T.L. Listed

### COMPATIBILITY

 <b>C260</b> C-CHANNEL HANGER BAR SET	 <b>L270</b> LINEAR HANGER BAR SET	 <b>LR669</b> WALL WASH W/ PRISMATIC LENS
---	--	---

Assembled in U.S.A.

Note: Wattage limitations on compatible items must be met.

### ORDERING

ORDERING EXAMPLE : LWH6213ADV-SM-FS

LWH6	WATTAGE	BALLAST	OPTIONS
<b>LWH6</b>	<b>213</b> : (2) 13W	<b>UD</b> : 0-10V Dimming (120V/277V)	<b>Blank:</b> None
	<b>218</b> : (2) 18W	<b>UE</b> : 120V/277V Electronic	<b>-EM</b> : Emergency (Remote)
	<b>226</b> : (2) 26W	<b>ADV-SM</b> : 120V/277V Smart Mate	<b>-FS</b> : Fuse
		<b>ADV-M7</b> : 120V/277V Mark VII Dimming	
		<b>ADV-M10</b> : 120V Mark X Dimming	
		<b>LUT-HL</b> : 120V Lutron 3-Wire Dimming	
		<b>LUT-HL-27</b> : 277V Lutron 3-Wire Dimming	
		<b>LUT-TW</b> : 120V Tu-wire Dimming	
		<b>UE-347</b> : 347V Electronic	
		<b>E</b> : 120V Electronic	