
GENERAL PURPOSE | ECONOMY

AFFORDABLE MINIATURE GENERAL PURPOSE RECESSED LED LIGHTING

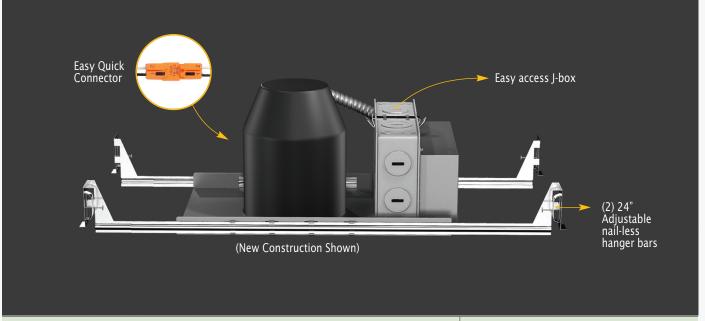

# **FEATURES**


- The most cost effective way to Energy Savings
- Available for New Construction and Remodel Applications
- Proprietary Quick-Connect is compliant with Title 24
  and other building codes restricting the use of two pi
- Simple 2-wire connection to 120V sources
- No driver, transformer or ballast required

and other building codes restricting the use of two-pin or medium base sockets in certain applications  $\,-\,$ 

## - LH3-QC




## **NEW CONSTRUCTION HOUSING**



**LED** • 24" Adjustable Hanger Bars • Airtight • IC rated • Integral Thermal Protector insures safe installation and operation • Junction Box is listed for through branch circuit wiring (2 in - 2 out) with 1/2" knock-outs • Quick Connector meets Title 24 and other standards restricting use of bi-pin and medium base sockets • ETL Listed for feed through and damp location.

# ► LH3R-QC Ceiling Cut-Out 3¾″

### **REMODEL HOUSING**



**LED** • Airtight • IC rated • Integral Thermal Protector insures safe installation and operation • Junction Box is listed for through branch circuit wiring (2 in – 2 out) with 1/2'' knock-outs • Quick Connector meets Title 24 and other standards restricting use of bi-pin and medium base sockets • ETL Listed for feed through and damp location.

# 3" ECONOMY LED RECESSED TRIMS

120V | 4W 230Lm | 9W 460Lm

**ECONOMY** 

**GENERAL PURPOSE** 

**CALIFORNIA TITLE 24 COMPLIANT** 

- 3" aperture makes lighting small or spacechallenged areas inexpensive and easy
- Electronic Low Voltage Dimming is Standard. Compatible with most ELV and Incandescent dimming systems
- 80CRI, 3000K CCT
- Est. Life 35,000 Hours, L70 from TM21 Calculations
- ETL Listed, Title 24 Compliant
- Damp Location Rated, Wet Location Option (-WL)
- Beautiful Designer Finishes

Ordering Example: LRELD321W-L05



Ordering Example: LRELD393N-L05



