

AG2 · SERIES

LITON[®]
OUTDOOR

AG2·SERIES

Advanced outdoor lighting for controlled illumination.

LITON[®]
OUTDOOR

The underside of a tree canopy is illuminated by AG2360 in background

LITON[®]
OUTDOOR

Accent/Spot/Flood

LITON introduces the new AG2-Series, a versatile family of commercial-grade IP65 rated accent, spot, flood lights, to bring sparkle and drama to your outdoor landscape lighting.

The low glare regressed singular COB luminaires include these exciting options:

NEW Variable Beam with field adjustable beam angle from 20° to 50° with clickable pre-set beam options.

RGBW color changing via Wireless Bluetooth or DMX512 for fine-tuned pastel colors and saturated hues.

BENEFITS

- High lumen output up to 16,000LM (160W)
- Variety of mounting methods
- 120-277V/347V Input options
- Optional field adjustable Variable Beam, CCT, and dimming options
- Optional Glare Shield (-SH) to minimize glare



AG2340 shown with optional Glare Shield (-SH)

Two Shapes, Three Sizes

4"



AGQ2340
1000lm-1500lm
(10W-15W)
SDL

4"



AG2340
1000lm-1500lm
(10W-15W)
SDL

6"



AG2360
1000lm-2600lm
(10W-30W)
RMT or SDL

8"



AG2380
7500lm-16,000lm
(70W-160W)
RMT or SDL



SDL (Integral Daylight)



RMT (Remote Motion/Daylight)

STANDARD FINISHES



White

Silver

Bronze

Black

SPECIAL ORDER FINISHES



Light Silver

Dark Gray

Metallic Gold

Metallic Black



Emergency Backup



US Assembled



120V



277V



347V Option



Turtle Safe Option



RGBW Option



VARIABLE BEAM



LINK TO WEB PAGE

AG2·SERIES

The AG2340 provides a dramatic accent to a tree canopy

Accent/Spot/Flood

Lighting applications include:

- Uplight for ambience or directional Viewing
- Downlight for task lighting
- Accent/Spotlight to complement foliage
- Wall Wash to silhouette landscape plantings and foliage



180° Tilt
Typical

Optional Shield
(-SH) feature to
minimize glare

Heavy duty
knuckle feature with
locking teeth

360°
Rotation
Typical

Weep hole feature
for water drainage


Set screw
for rotation



LINK TO WEB PAGE

AG2·SERIES

THE AG2-SERIES ILLUMINATES UP TO 100' AWAY!

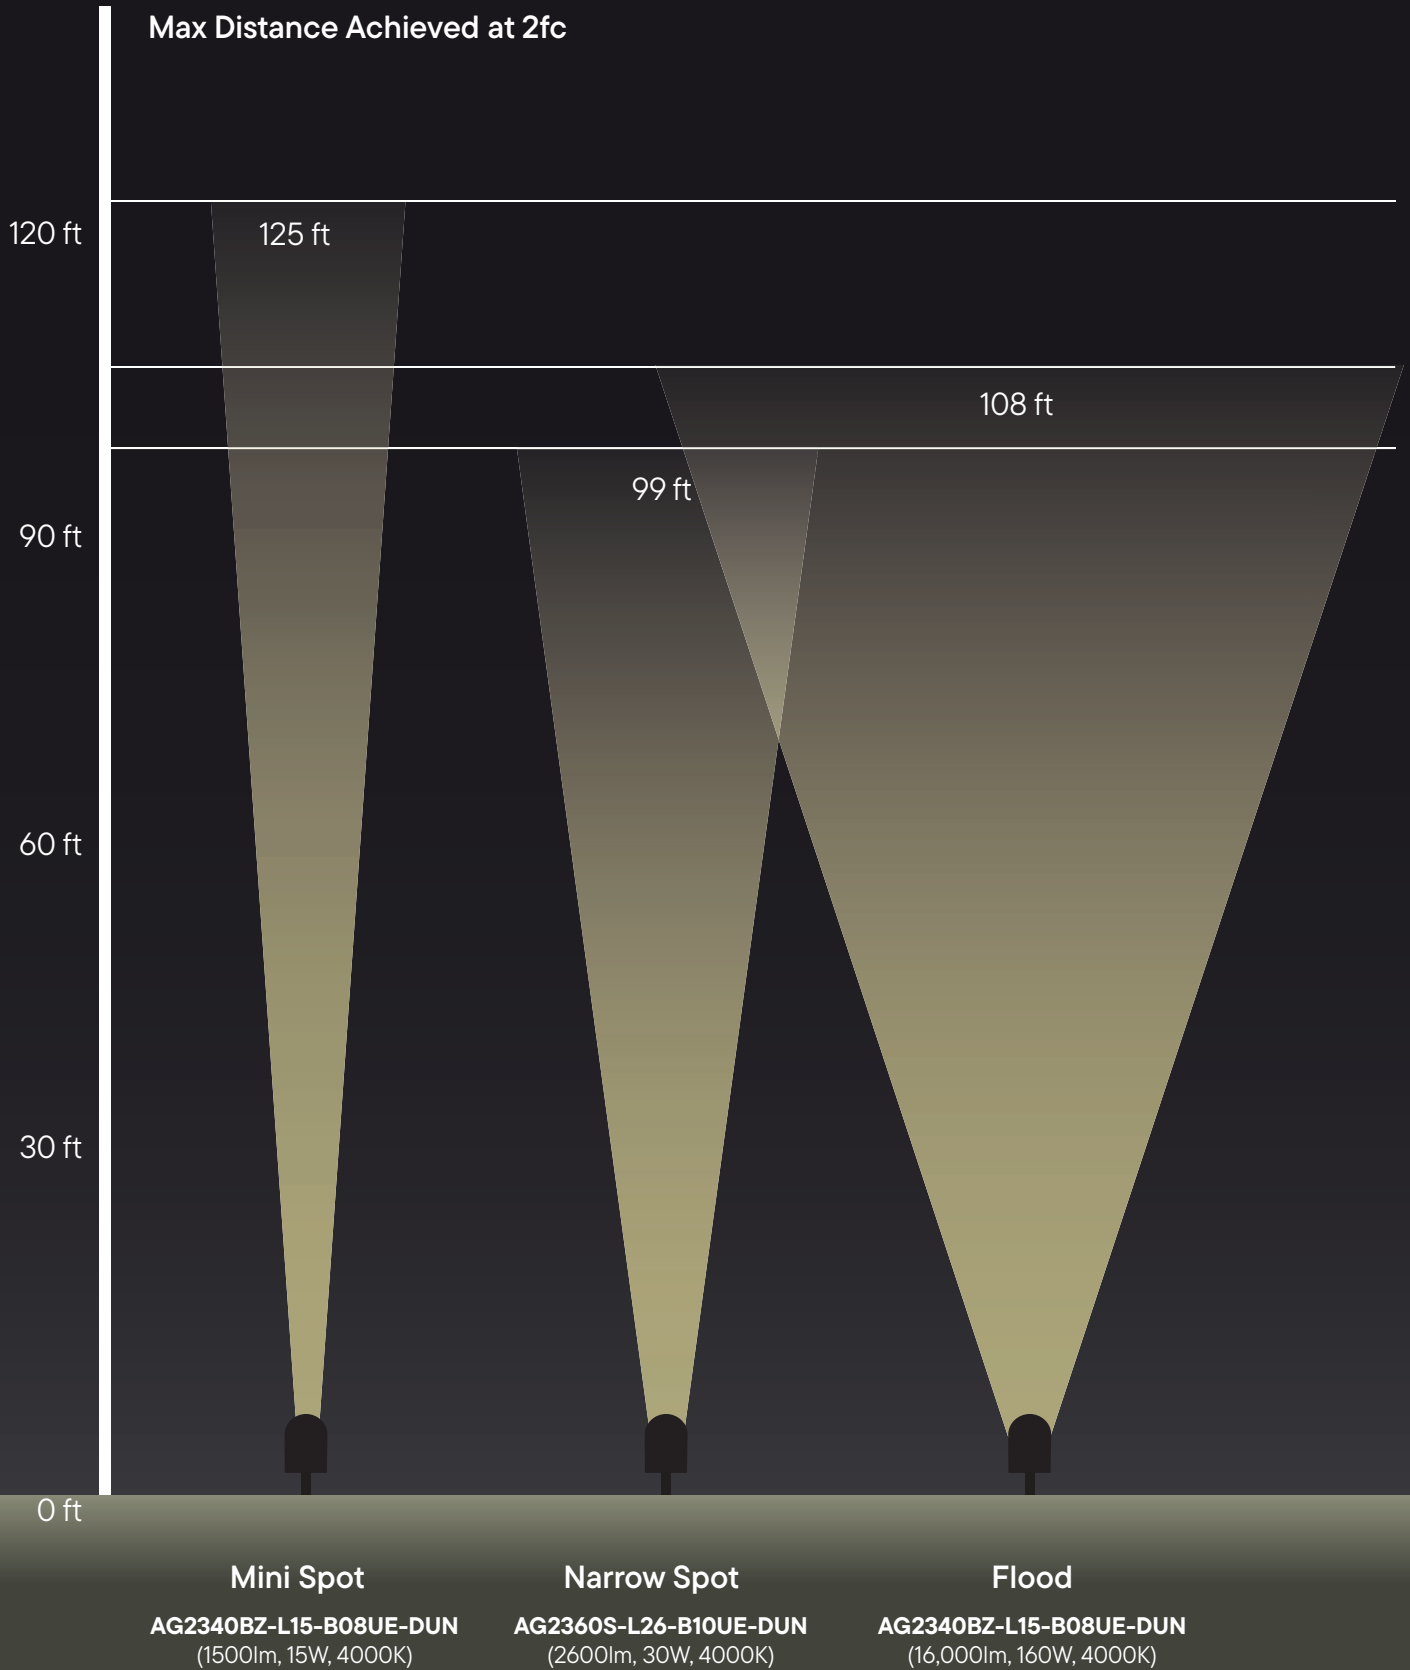


Accent/Spot/Flood - Options



Face Mount Emergency Back Pack Option
 Feature is wet location rated and self diagnostic, operating from 120V to 347V with an integral surge protector



RGBW Color Option
 Feature allows fine-tuned pastel colors and saturated hues in millions of colors

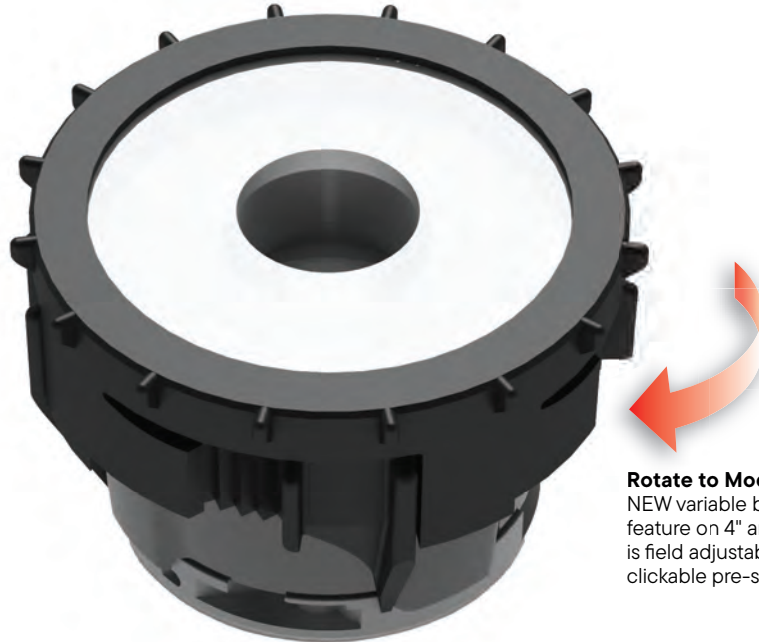

Rotate to Modify Beam Angle
 NEW variable beam option is a feature on 4" and 6" models, and it is field adjustable from 20° to 50° with clickable pre-set beam options

STANDARD BEAMS



SPECIALTY BEAMS



LINK TO WEB PAGE

AG2·SERIES

Suggested Lighting Applications

A) Uplight

Fixtures are aimed away from the viewer and placed behind foliage to avoid glare and maintain a natural looking landscape.




B) Accent/Spotlight

Mount at grade level or overhead to accent details and specify (-SH) Shield to minimize glare.




C) Downlight

For outdoor activity areas, place downlighting above eye level for safety and security. Fixtures can be mounted to building facades or trees.

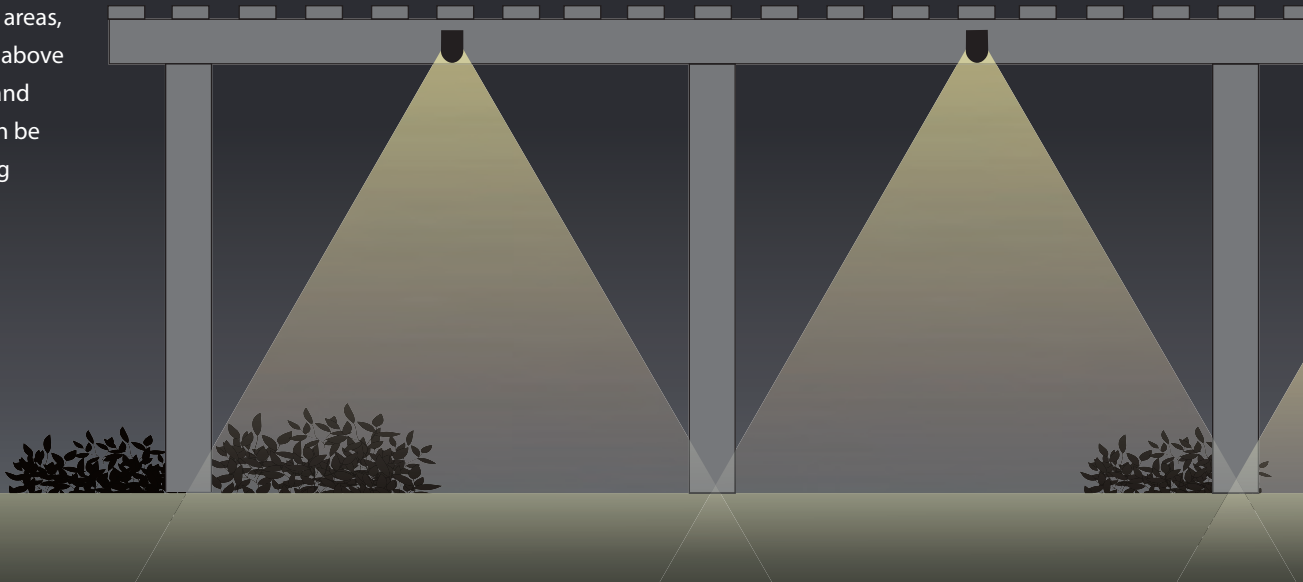


D) Moonlight

A combination of up and downlighting creates the effect of moonlight, bringing a sense of mystery with highlight and shadow accents.

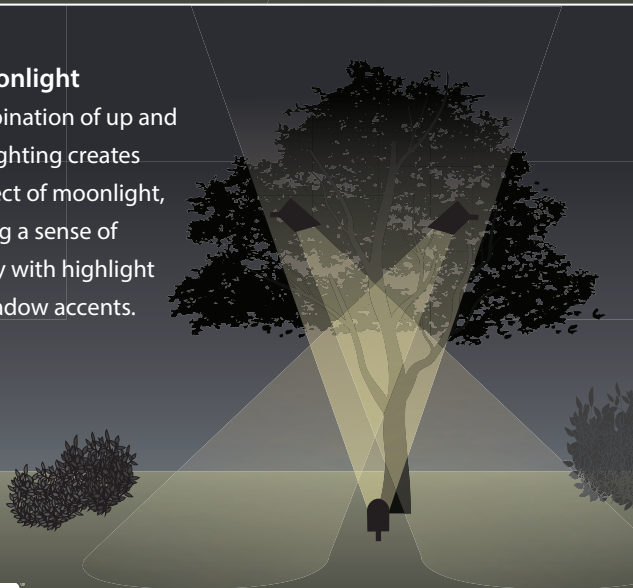

E) Wall Wash/Silhouette

Natural foliage is dramatic when silhouetted against a wall washed with light. Wall Washes provide uniformity when lighting signs and flagpoles.

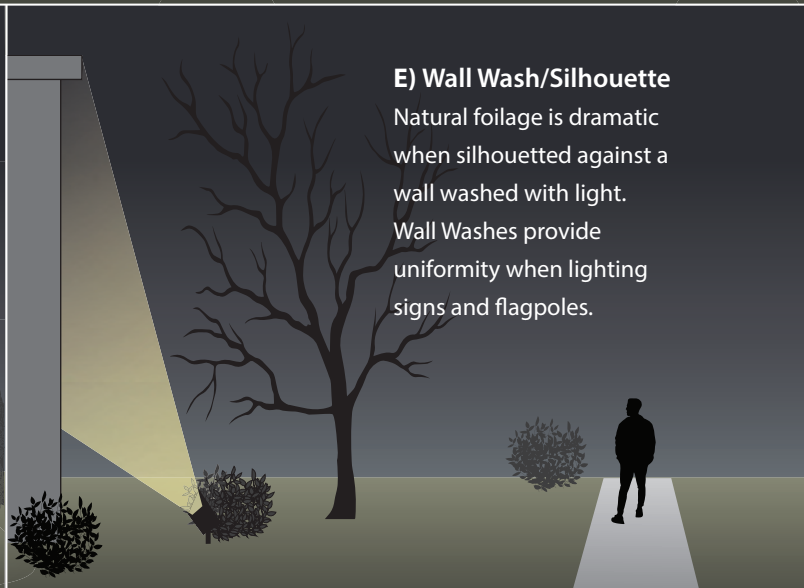

Accent/Spot/Flood - Mounting




AG2340 with Tenon Reducer Hub for mounting two luminaires on a pole



AG2340 with L-Connector and Stem for sign lighting

Mounting Methods/Options



1/2" IPS
Threaded







Plate Mount
(-PL)




Stake Mount
/AG2-SPK
/AG2-SPK-AC




Tree Mount
Fixture w/ (-JB)



Integral J-Box
(-JB)




Pole Top Mount
(/AG2-TRH-1/2)




Integral Emergency
Mount (/AG2-EMB)

Stem Configurations

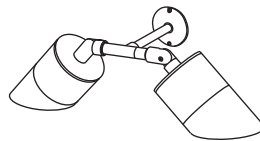

T-Connector
(/AG2-T)



Stem Coupler
(/AG2-CPL)



6" Stem Mount
(/AG2-STM06)



LINK TO WEB PAGE