

LUMENPOLE

MODERN BOLLARDS/COLUMNS



LumenPole Bollards & Columns

LumenPole Bollards and Columns are designed to deliver precise, pedestrian-level illumination while seamlessly blending form and function. Available in versatile sizes, they adapt effortlessly to any building or outdoor space.

Balancing visual appeal with practical performance, LumenPole enhances the atmosphere of gardens, pathways, walkways, commercial spaces, retail areas, residential projects, and public gathering spaces. Whether for large-scale developments or intimate outdoor settings, LumenPole creates a refined and inviting ambiance with its elegant, even illumination.

The Round Frosted Lens Bollards and Columns (BL2R) provide soft, uniform lighting by diffusing glare and minimizing harsh shadows, ensuring comfort for pedestrians. For applications requiring defined lighting patterns, the Round and Square Lensed Reflector on Open Frame models (BL2RZ, BL2QZ) offer precise light control while maintaining Dark Sky compliance to reduce light pollution.



Available with
Top Mount Spotlight

- Up to 50W, 3100lm delivered
- Dark Sky Compliant
- US Assembled
- Tamper Resistant Hardware
- IK08 Impact Rating
- RGBW, Photocell & Integral Emergency Options
- Quick Ship Options
- Full IES files available



BL2R-31/40
1200lm/1500lm
(13W/18W)



BL2R-78
2100lm
(25W)



BL2QZ-98
1100lm - 3000lm
(20W - 50W)



BL2QZ-59
1100lm - 3000lm
(20W - 50W)



BL2RZ-78
1000LM - 2600lm
(20W - 50W)

Round Frosted, or Round & Square Open Frame Styles



BL2R Round Frosted Lens






BL2RZ Round Open Frame




BL2RZ Square Open Frame

Designed For Architectural Relevance

By progressively decreasing the height of the luminaire, the fixtures serve as a way finder, pointing the way to the building entrance as pedestrians move closer to a building.

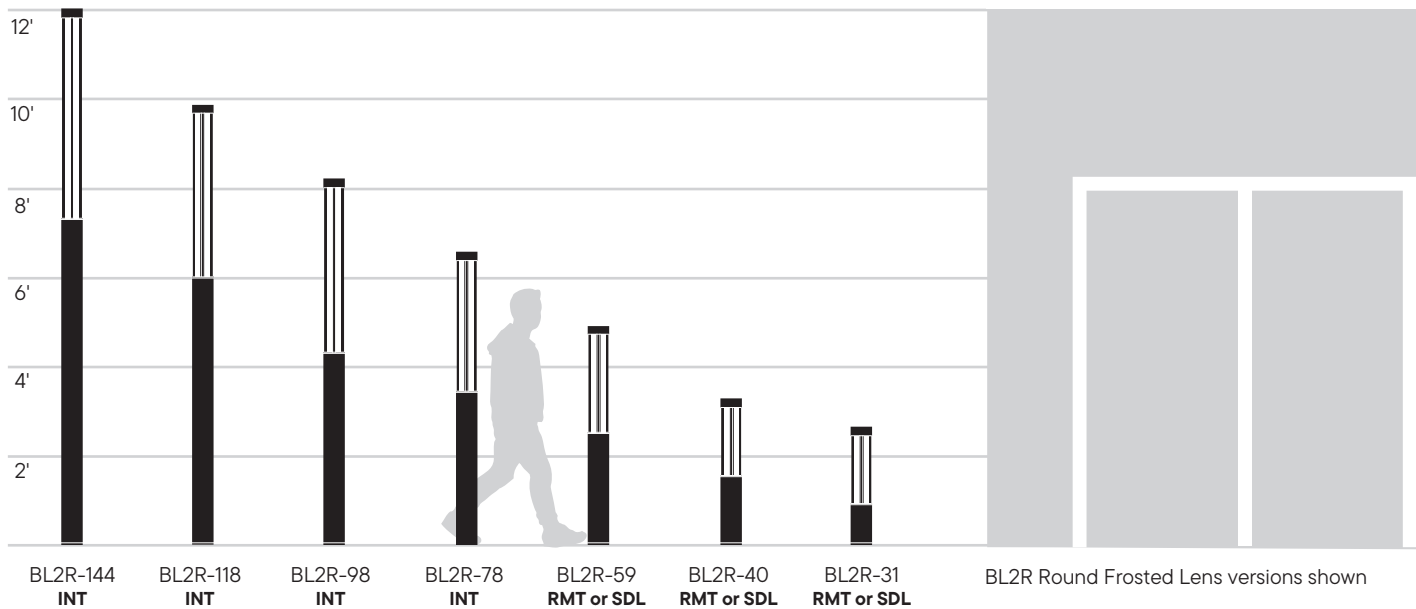

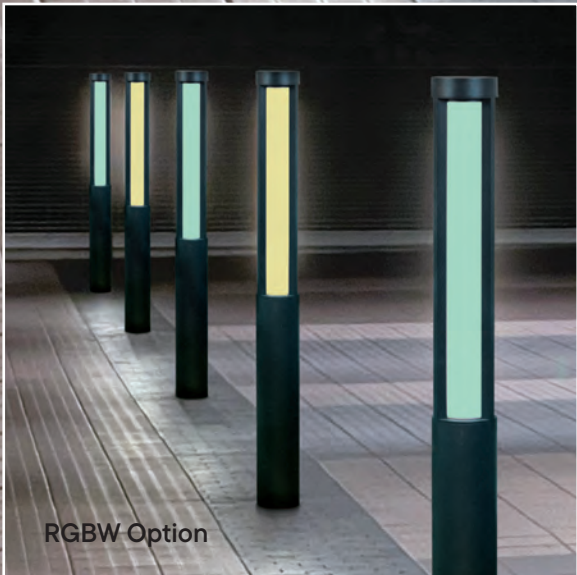

RGBW Option

BL2R-78s providing direction to parking garage traffic



LINK TO WEB PAGE

Premium Construction

Constructed using premium materials, LumenPole is durable and weather resistant, blending seamlessly into any architectural setting.

A 7-stage electrostatic, polymer process provides an outdoor textured powder coat finish that delivers out-standing durability, superior anti-aging, resistance to corrosion and UV degradation.

Consult factory for Custom Color.

FINISHES



COLOR TEMPERATURES




CERTIFICATONS & LISTINGS



Lighting Precision

The LumenPole Square Open Frame Bollard (BL2QZ-31) is available with inserts to block light output where it isn't needed.

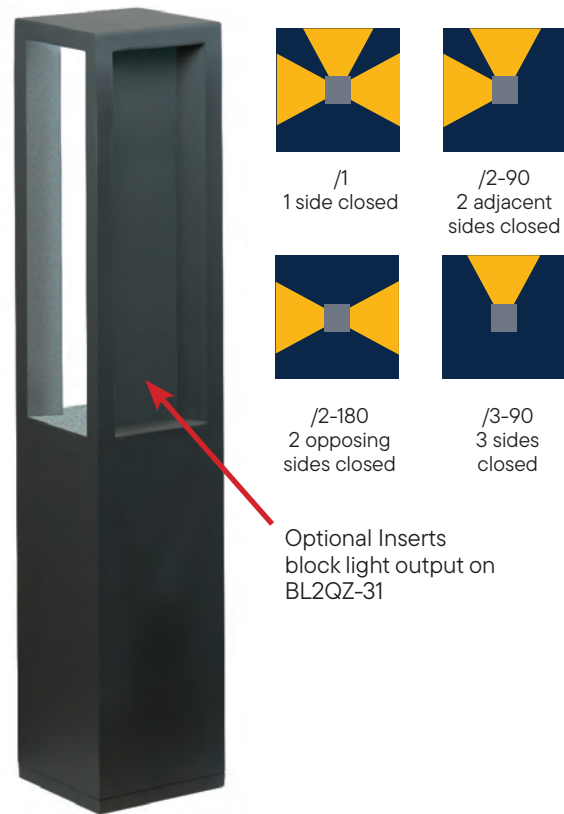

/1
1 side closed



/2-90
2 adjacent sides closed



/2-180
2 opposing sides closed



/3-90
3 sides closed

Optional Inserts block light output on BL2QZ-31

Easy, Yet Secure Access



59", 78", 98" and 118" Columns feature easy, yet secure tamper resistant access through side-entry electrical panel




BL2RZ-118s brighten an outdoor path on a college campus



LINK TO WEB PAGE

Options

Photocell
Sensor

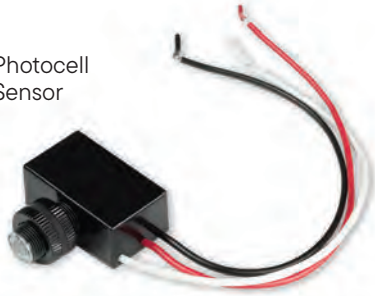

GFCI Provision
and In-Use Cover



Surge
Protector



Frosted
Lens



Integral
Emergency
Battery



DMX 512
Remote Mounted
Decoder



BL2RZ-31 Bollards enhance a roadside median strip



BL2RZ-31 Bollards provide security adjacent to a parking garage



BL2QZ-31, BL2QZ-59 and BL2QZ-144 luminaires provide an inviting entry into a park setting




LINK TO WEB PAGE


Dimensions

BL2R


Round Column
6" Frosted Lens
31" to 144" Height




BL2R-31
RMT or SDL




BL2R-40
RMT or SDL




BL2R-59
RMT or SDL

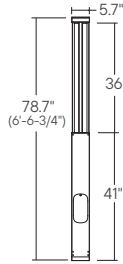


BL2R-78
INT

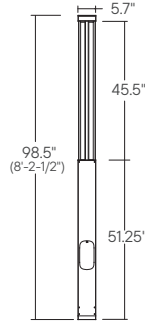

BL2R-98
INT

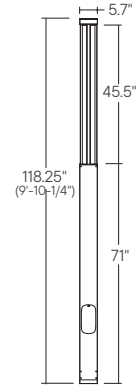


BL2R-118
INT

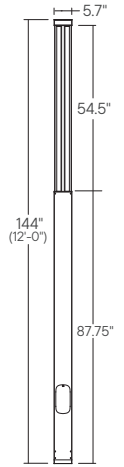


BL2R-144
INT

BL2RZ


Round Bollard & Column
6" Open Frame
40" to 144" Height




BL2RZ-31
RMT or SDL




BL2RZ-40
RMT or SDL




BL2RZ-59
RMT or SDL

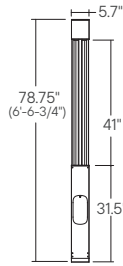


BL2RZ-78
INT

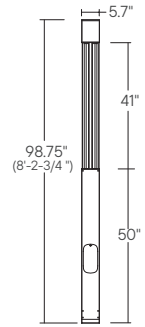

BL2RZ-98
INT

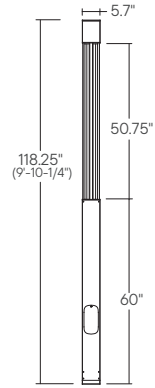


BL2RZ-118
INT

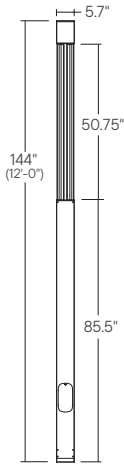


BL2RZ-144
INT

BL2QZ


Square Bollard & Column
6" Open Frame
40" to 144" Height




BL2QZ-31
RMT or SDL




BL2QZ-40
RMT or SDL




BL2QZ-59
RMT or SDL

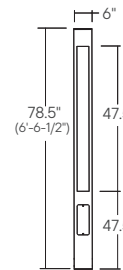


BL2QZ-78
INT

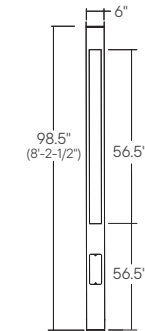

BL2QZ-98
INT

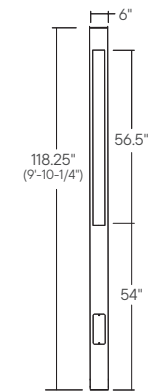

BL2QZ-118
INT

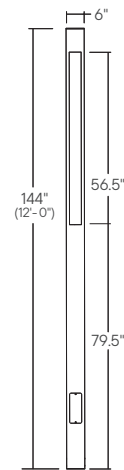

BL2QZ-144
INT



RGBW Option

WD261R-36s highlight entrances to commercial and retail businesses



PENDANT WEB PAGE



WALL MNT. WEB PAGE

Round Frosted Lens Wall & Pendant

LumenPole Wall and Pendant Frosted Lens versions extend the product line all the way into the building. Wall mount versions can be mounted up or down. RGBW color changing is also available.

BENEFITS

- 6" Round
- 1200lm-7300lm (13W-85W)
- Wall mount available with uplight & downlight
- Pendant available with downlight
- IK08 Impact Rating
- RGBW, and Photocell, options
- 12", 24" & 36" Pendant stem heights
- 5-year warranty
- Standard UniDim™ for all except (-RGBW)

Pendant Stem Mounts



DL261RP-19
19" Frosted Lens
Downlight/no Downlight
1200lm-3800lm
(13W-43W)
INT




DL261RP-28
28" Frosted Lens
Downlight/no Downlight
1700lm-4300lm
(20W-50W)
INT



DL261RP-36
36" Frosted Lens
Downlight/no Downlight
2100lm-4700lm
(25W-50W)
INT

Downlight Options

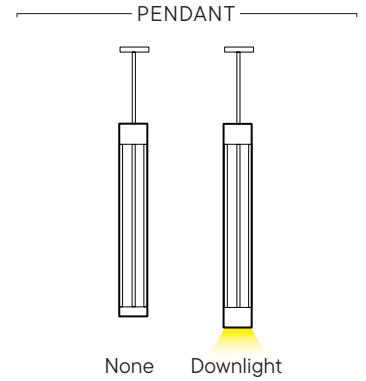

Wall Mount




WD261R-19
19" Frosted Lens
Single Arm
Uplight/Downlight
1200lm-4100lm
(13W-48W)
INT




WD261R-28
28" Frosted Lens
Double Arm
Uplight/Downlight
1700lm-6900lm
(20W-80W)
INT



WD261R-36
36" Frosted Lens
Double Arm
Uplight/Downlight
2100lm-7300lm
(25W-85W)
INT

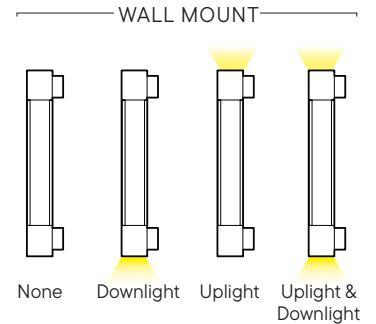


 **INT** (Integral Motion/Daylight)

STANDARD FINISHES

			
White	Silver	Bronze	Black

					
RGBW Option	US Assembled	120V	277V	347V Option	IK08



Optional Glare Shield feature

