


LCMLD56AC : 6" LUMEN DISC

DRIVER-LESS AC SURFACE MOUNT DOWNLIGHT 1100LM (15W)

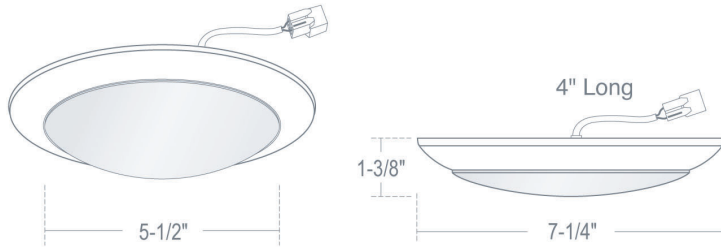

- Removable translucent lens for easy cleaning.
- White polycarbonate diffuser eliminates hot spots creating uniform light distribution.
- Die Cast Construction for Indoor/Outdoor use.

ORDERING : LCMLD56AC-T27

LCMLD56AC

Fixture Voltage Color Temperature Accessory Options

Voltage	Color Temperature	Accessory Options
120V	4000K -T40 ColorSelect 3000K -TS354 3500K /4000K	None Blank Recessed Housing Adapter /LCMLD-RTR

2026.02.16

SPECIFICATION

Application

6" General Purpose Surface Mount Downlight is perfect for Retrofit, New, Construction and Remodel Applications in low to medium height ceilings. Heavy duty diecast construction for Indoor/Outdoor installations.

LED Details

- 15W 1100 Lumen Package
- Color Rendering Index (CRI) : (90CRI)
- Lamp Equivalent: 65W BR30
- Color Temperature: 4000K

Control

Standard Low Voltage dimming option works with most standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, VELV-300P, NELV-450 along with 3-Way versions. Smoothly dims down as low as 10% of initial light output with flicker-free operation.

Thermal Management

Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver

Electronic Direct Current driver mounted on fixture. Smoothly dims down to 5% with standard Low Voltage dimmers.

Color Temperature

Available with Colorselect 3000K, 3500K, 4000K and with standard 4000K. LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Safety Labels

ETL/CETL listed. NYC approved: Calendar #41937. High Efficacy Luminaire Certified by the California Energy Commission (CEC) as Title 24 / JA8 Compliant.

Warranty

Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and voided warranty.

Wet Location

Suitable for Wet Location Installations.

Title 24/JA8 Compliant

- LCMLD56AC_-TS354