


## LD533V024-1227-60-D10 - 60W 120V/277V 0-10V DIMMING DRIVER (24V DC) LED PRO-STICK



### SPECIFICATION

24V 60W LED

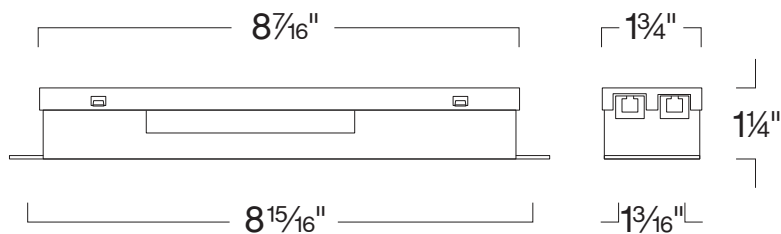





#### Features:

- Isolated output power per NEC and UL Safety Requirements
- Dimmable with standard 0-10V Dimmers and Dimming Systems
- Remote Mounting up to 18 feet away at full load with 18AWG Wiring
- Surge Protection of 2KV

#### Electrical:

- Input Voltage:** 120VAC-277VAC 50/60 HZ
- Input Current:** 60W Version: 0.6A at 120V / 0.26A at 277V
- Efficiency:** 85% Min
- Allowable Temperature:** -10F to 130F
- Power Factor:** >95%
- THD Max:** 10%
- All Wires:** Min. 6" Length (Exposed)
- IP RATING:** IP66 Dry Location Only
- Label:** UL Recognized

### COMPATIBILITY

 <a href="#">LK136SLED</a> <b>LINKALED PUCK LIGHT (SURFACE MOUNTED)</b>	 <a href="#">LULEDB</a> <b>LINKALED BAR</b>	 <a href="#">LULEDBP</a> <b>PROFESSIONAL GRADE LED STICK</b>
 <a href="#">LUTKLED24V1</a> <b>24V 12" STRIP</b>	 <a href="#">LK136LED</a> <b>LINKALED PUCK LIGHT (RECESSED)</b>	 <a href="#">LULEDBW</a> <b>WET LOCATION LED BAR</b>
<a href="#">LD5V24-24-PI</a> <b>24V/24W PLUGIN DRIVER</b>		

Note: Wattage limitations on compatible items must be met.

#### Benefit:

- Dimmable with 0-10V Dimmers
- Runs cooler than Magnetic Drivers
- Works in Non-Dimming Applications as well