


LH1299 - NEW CONSTRUCTION (NON-IC) 2" LOW VOLTAGE DOWNLIGHT HOUSINGS

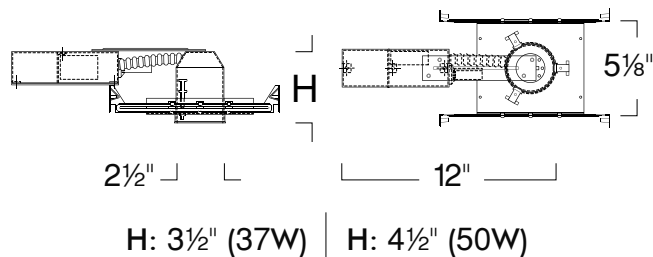

5 1/2" minimum clearance above ceiling recommended for installation and maintenance access. Can be used for remodel applications as well.

SPECIFICATION

12V Out MR11/MR16

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction and remodel installations, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.


Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.







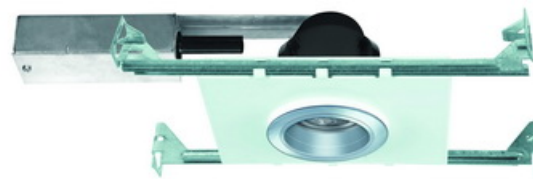



Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Label: cETL Listed



COMPATIBILITY

 LR1203 CROSS BLADE	 LR1213 MR11 BAFFLE	 LR1219 MICRO PINHOLE W/ BLACK REFLECTOR
 LR1293 MR16 BAFFLE	 LRSQ1211 MR11 SQUARE TRIM	 LR1211 MR11 REFLECTOR
 LR1218 MICRO EYEBALL	 LR1266 MICRO GIMBAL DIE- CAST	 LR1221 MR16 REFLECTOR
 LR1267 MICRO PULL DOWN		

Note: Wattage limitations on compatible items must be met.

FEATURE:



LH1299	OPTION	ACCESSORIES
LH1299	Blank :37W (120V)	/LBL20 :20W Derating
	-50 :50W (120V)	/LBL35 :35W Derating
	-50-27 :50W (277V)	

ORDERING EXAMPLE : LH1299

ID#: 1139