


LH3IC-GU10 - IC HOUSING

3" LINE VOLTAGE GU10 MR16 RECESSED LIGHTING

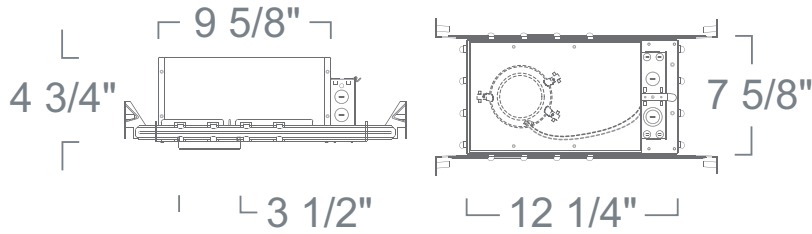

SPECIFICATION

120V 50W MR16 GU10

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Standard porcelain medium screw base socket with high temperature leads.









Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Lamping: Available in 50W Incandescent and 12W LED.

Label: cETL Listed

COMPATIBILITY

 LR1316 DECO GLASS DOME	 LR1321 REFLECTOR	 LR1389 ADJUSTABLE GIMBAL
 LR1393 BAFFLE	 LR1321 REFLECTOR	 LR1316 DECO GLASS DOME
 LR1319 PINHOLE W/ REFLECTOR	 LR1393 BAFFLE	

Note: Wattage limitations on compatible items must be met.

2016.9.20

FEATURE:



ORDERING EXAMPLE : LH3IC-GU10A

LH3IC-GU10	RATING	LAMPING
LH3IC-GU10	Blank :Standard A :Airtight	Blank :50W Incandescent -LBL12 :12W LED

ID#: 2174