


LH3RA-GU10 - REMODEL HOUSING

3" LINE VOLTAGE GU10 MR16 RECESSED LIGHTING

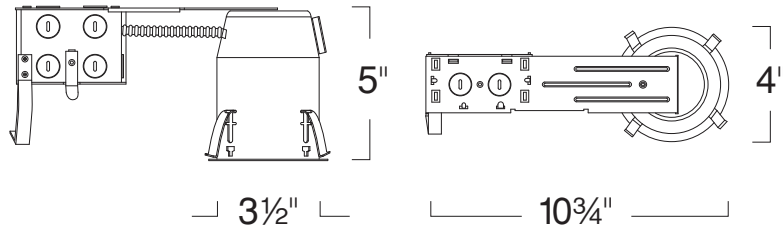

SPECIFICATION

120V 50W Max MR16 GU10

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.










Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

COMPATIBILITY

 LR1321 REFLECTOR	 LR1316 DECO GLASS DOME	 LR1389 ADJUSTABLE GIMBAL
 LR1319 PINHOLE W/ REFLECTOR	 LR1393 BAFFLE	 LRSQ1373 3" MR16 FIXED WALL WASH
 LRSQ1316 3" MR16 ADJUSTABLE ACCENT	 LRSQ1317 3" MR16 TRIM W/FROSTED LENS	 LRSQ1319 3" MR16 BAFFLE

Note: Wattage limitations on compatible items must be met.

2016.9.20

FEATURE:



LH3RA-GU10	WATTAGE	VOLTAGE
LH3RA-GU10	Blank :50W	Blank :120V

ORDERING EXAMPLE : LH3RA-GU10

ID#: 2013