


LH99RA-GU10 - REMODEL 4" LINE VOLTAGE GU10-MR16 HOUSINGS

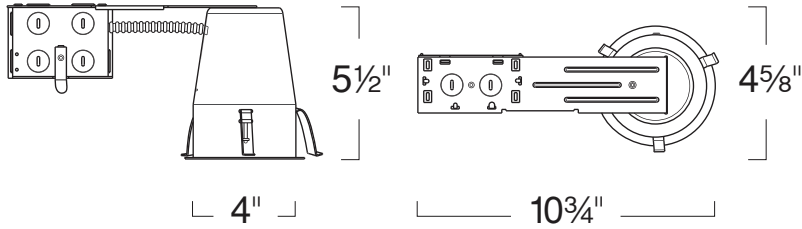

SPECIFICATION

120V 50W Max MR16 GU10

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated for 12W LED or lower. Non IC rated for more than 12W housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

COMPATIBILITY

 LR1419 PINHOLE W/ PHENOLIC BAFFLE	 LR1421 REFLECTOR	 LR1409 ADJUSTABLE GIMBAL
 LR1419 PINHOLE W/ PHENOLIC BAFFLE	 LR1446 DECO GLASS-SHIELD (DOME)	 LR1446 DECO GLASS-SHIELD (DOME)
 LR1409 ADJUSTABLE GIMBAL	 LR1493 METAL BAFFLE	 LR1493 METAL BAFFLE
 LR1495 WALL WASH BAFFLE	 LR1421 REFLECTOR	 LR1495 WALL WASH BAFFLE
 LRSQ1419J ADJUSTABLE SQUARE TRIM		

Note: Wattage limitations on compatible items must be met.

2016.8.30

FEATURE:



ORDERING EXAMPLE : LH99RA-GU10

LH99RA-GU10	WATTAGE	VOLTAGE
LH99RA-GU10	Blank :50W	Blank :120V

ID#: 1296