


## LHLD2R - REMODEL LED HOUSING 2" LED RECESSED CABINET & DISPLAY

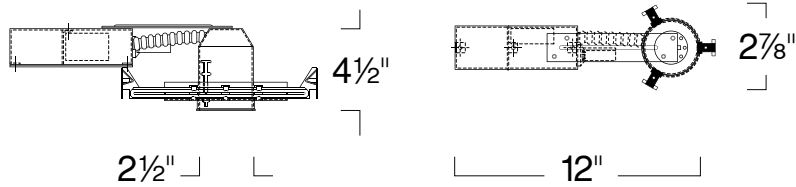

### SPECIFICATION

120V LED

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Power Connection:** LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

**Driver:** Electronic Direct Current LED driver integrally mounted in electric junction box.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.






**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

**Label:** cETL Listed

**Assembled in USA**

### COMPATIBILITY

 <b>LRLD219</b> LED PINHOLE	 <b>LRLD221</b> LED REFLECTOR	 <b>LRLD222</b> WET LOCATION LED LENS
 <b>LRLD266</b> LED ADJUSTABLE MICRO GIMBAL	 <b>LRLD293</b> LED BAFFLE	

Note: Wattage limitations on compatible items must be met.

**Benefit:** Designed for cabinet, display and accent applications  
Electronic Low Voltage (ELV) dimming option  
Driver mounted on external J-Box for cooler LED operation

2016.6.14

### FEATURE:



ORDERING EXAMPLE : LHLD2R04A

LHLD2R	WATTAGE	
LHLD2R	04A	:4W
	04A-DLV	:4W Dimming

ID#: 2205



Product specifications subject to change without notice.  
Tel: 323.904.0200 www.liton.com

