


LHR1299 - REMOTE HOUSING - NO TRANSFORMER

2" LOW VOLTAGE DOWNLIGHT HOUSINGS



H: 3 1/2" (37W), 4 1/2" (50W)

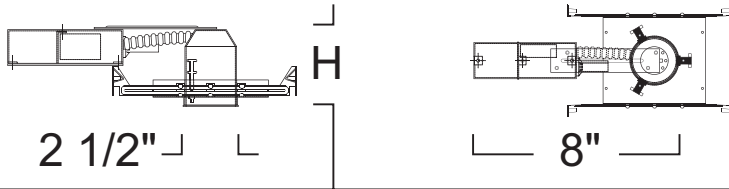

SPECIFICATION

12V Out 37W Max MR11/MR16

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Trim is secured with torsion wing springs.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Remote Transformer: For use with thermally protected electronic low voltage transformer (not supplied) to be mounted in remote location away from fixture.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.











Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

COMPATIBILITY

 LR1213 MR11 BAFFLE	 LR1219 MICRO PINHOLE W/ BLACK REFLECTOR	 LR1293 MR16 BAFFLE
 LRSQ1211 MR11 SQUARE TRIM	 LR1211 MR11 REFLECTOR	 LR1218 MICRO EYEBALL
 LR1266 MICRO GIMBAL DIE-CAST	 LR1203 CROSS BLADE	 LR1221 MR16 REFLECTOR
 LR1267 MICRO PULL DOWN		

Note: Wattage limitations on compatible items must be met.

2016.6.14

FEATURE:



ORDERING EXAMPLE : LHR1299

LHR1299	WATTAGE	ACCESSORIES
LHR1299	Blank :37W -50 :50W	/LBL20 :20W Derating /LBL35 :35W Derating

ID#: 1142