




LR1342 - REFLECTOR W/ FROSTED LENS (MR16) 3" LOW VOLTAGE TRIMS

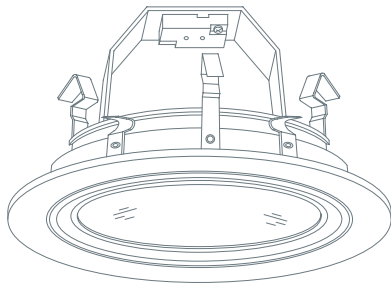

2 3/8"

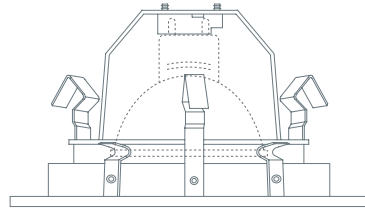

4 3/8"

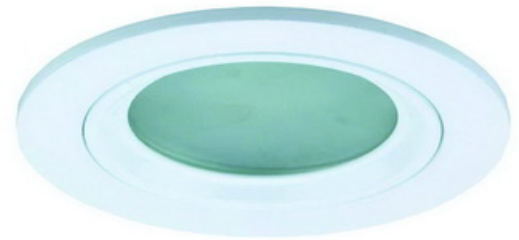

SPECIFICATION

12V 50W Max MR16 GU5.3

Application: These attractive glass trims give class and a touch of elegance to a space that requires optimum performance. Fully lensed trims adhere to extremely damp locations, such as saunas and shower stalls. Utilizing a frosted lens can soften the light output.

Socket: 2 pin porcelain socket included with trim. Some wiring required.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.





Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Ring Finish: Die-Cast Aluminum Trim Ring Available in White, Black and Natural.

Label: UL Listed, cETL Listed

COMPATIBILITY

| | | |
|--|--|--|
|  LH1399R REMODEL HOUSING |  LSH1399RE SHALLOW REMODEL HOUSING |  LSH1399IC SHALLOW IC HOUSING |
|  LH1399 STANDARD HOUSING |  LSH1399 SHALLOW HOUSING |  LH1399IC IC DOUBLE WALL HOUSING |

Note: Wattage limitations on compatible items must be met.

2016.9.13

FEATURE:



ORDERING EXAMPLE : LR1342N-WL

| LR1342 | RING FINISH | RATING |
|--------|---|---|
| LR1342 | W :White B :Black N :Natural | Blank :Damp Location -WL :Wet Location |

ID#: 263