


## LR1377 - ADJUSTABLE SPOT - BAFFLE

### 3" LOW VOLTAGE TRIMS

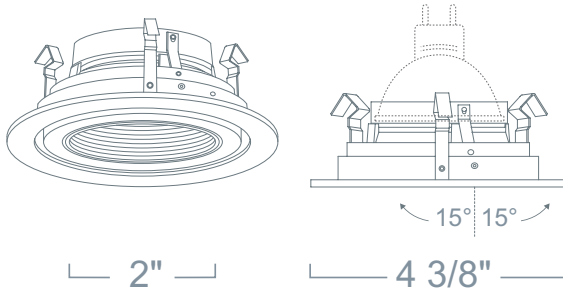

Does not take standard MR16 lens media, L40S for Yellow Lens, L41S for Blue Lens, L43S for Green Lens, LR49S for Sand Spread Lens, L50UV for UV Filter Lens, L55S for Linear Spread Lens.

### SPECIFICATION

12V 50W Max MR16 GU5.3

**Application:** Provides flexibility and versatility by doubling as both a downlight and as an accent light. This trim has a larger degree of rotation resulting in both visual style and practical ergonomics.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Baffle & Trim Finish:** Die-Formed Construction Available in Black Baffle/Black Trim, Black Baffle/White Trim and White Baffle/White Finish.

### COMPATIBILITY

 <b>LH1399R</b> REMODEL HOUSING	 <b>LSH1399</b> SHALLOW HOUSING	 1 3/4" MR16 COLOR LENS
 <b>LSH1399RE</b> SHALLOW REMODEL HOUSING	 1 3/4" MR16 COLOR LENS	 <b>LH1399</b> STANDARD HOUSING
 1 3/4" MR16 FILTER LENS	 1 3/4" MR16 FILTER LENS	 <b>LSH1399IC</b> SHALLOW IC HOUSING
 <b>LH1399IC</b> IC DOUBLE WALL HOUSING		

Note: Wattage limitations on compatible items must be met.

2017.6.6

### FEATURE:



ORDERING EXAMPLE : LR1377BW

LR1377	BAFFLE & TRIM FINISH	ACCESSORIES
<b>LR1377</b>	<b>BB</b> :Black Baffle/Black Trim	<b>/L38S</b> :Clear Lens
	<b>BW</b> :Black Baffle/White Trim	<b>/L39S</b> :Red Lens
	<b>WW</b> :White Baffle/White Finish	<b>/L40S</b> :Yellow Lens
		<b>/L41S</b> :Blue Lens
		<b>/L42S</b> :Amber Lens
		<b>/L43S</b> :Green Lens
		<b>/L49S</b> :Sand Spread Lens
		<b>/L53S</b> :Micro - Prismatic Spread Lens

ID# : 272