


LR1380 - PULL DOWN W/ SNOOT 3" LOW VOLTAGE TRIMS

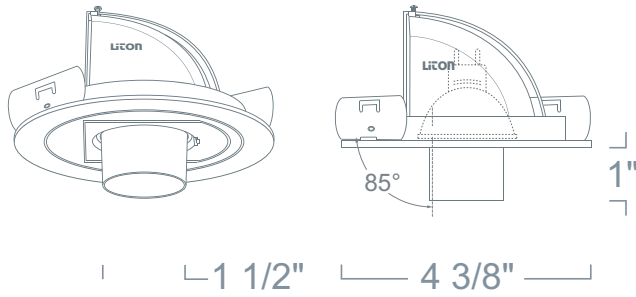

Does not take standard MR16 lens media, L40S for Yellow Lens, L41S for Blue Lens, L43S for Green Lens, LR49S for Sand Spread Lens, L50UV for UV Filter Lens, LV54 for Diffuse Spread Lens, L55S for Linear Spread Lens.

SPECIFICATION

12V 50W Max MR16 GU5.3

Application: Provides flexibility and versatility by doubling as both a downlight and as an accent light. This trim has a larger degree of rotation resulting in both visual style and practical ergonomics.







Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Ring Finish: Die-Formed Construction Available in White, Black, Natural and Copper.

COMPATIBILITY

 LSH1399 SHALLOW HOUSING	 LSH1399RE SHALLOW REMODEL HOUSING	 LSH1399IC SHALLOW IC HOUSING
 LH1399IC IC DOUBLE WALL HOUSING	 LH1399R REMODEL HOUSING	 LH1399 STANDARD HOUSING

Note: Wattage limitations on compatible items must be met.

2016.9.13

FEATURE:



ORDERING EXAMPLE : LR1380CO

LR1380	RING FINISH	ACCESSORIES
LR1380	W :White	/L38S :Clear Lens
	B :Black	/L39S :Red Lens
	N :Natural	/L40S :Yellow Lens
	CO :Copper	/L41S :Blue Lens
		/L42S :Amber Lens
		/L43S :Green Lens
		/L49S :Sand Spread Lens
		/L53S :Micro - Prismatic Spread Lens

ID# : 273