



LR1403 - BAFFLE W/ CLEAR LENS 4" LOW VOLTAGE TRIMS

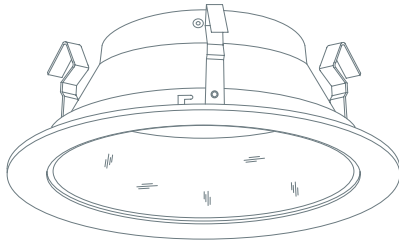

3 1/2"



5"



SPECIFICATION

12V 75W Max MR16 GU5.3

Application: Great for accent and task lighting applications. The 4" baffle trim with its clean and durable die-cast construction provides a smooth illumination in short throw distances such as soffits and counters.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.







Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural*, All Copper* and All Mocha*.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Natural, Copper and Mocha.

COMPATIBILITY

 LH1499 STANDARD HOUSING	 LH1499IC IC DOUBLE WALL HOUSING	 LH1499R REMODEL HOUSING 120V/277V
 LSH1499 SHALLOW HOUSING	 LSH1499IC SHALLOW IC HOUSING	 LSH1499R SHALLOW REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

2023.04.14

FEATURE:



ORDERING EXAMPLE : LR1403W

LR1403	BAFFLE FINISH	RING FINISH	RATING	ACCESSORIES
LR1403	W :White	Blank :White	Blank :Damp Location	/L38 :Clear Lens
	B :Black	B :Black	-WL :Wet Location	/L40 :Yellow Lens
	N :All Natural*	N :Natural		/L41 :Blue Lens
	MO :All Mocha*	CO :Copper		/L42 :Amber Lens
		MO :Mocha		/L43 :Green Lens
				/L44 :Daylight Blue Lens
				/L48 :Lens with Internal Louver Filter
				/L49 :Frosted Soft Focus
				/L50UV :UltraViolet Filter
				/L53 :Micro - Prismatic Spread Lens
				/L55 :Linear Spread Lens
				/LL16B :Black
				/LL16C :Clear

* Comes standard with a matching ring finish. Use "W" for White Ring.

ID#: 199