


## LR1435 - ADJUSTABLE SPOT

### 4" LOW VOLTAGE TRIMS

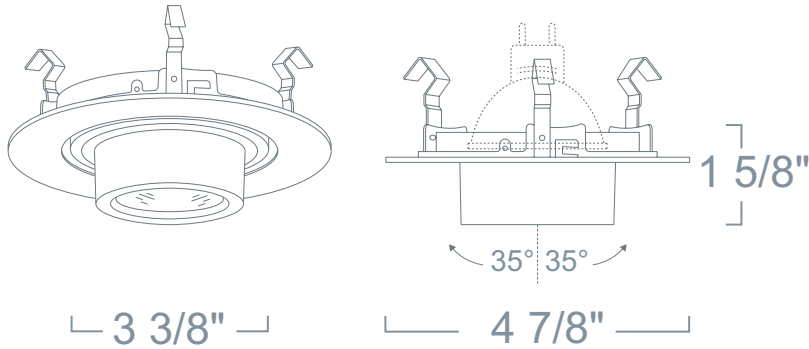

### SPECIFICATION

12V 75W Max MR16 GU5.3

**Application:** These **adjustable** fixtures provide flexibility and versatility by doubling as both a downlight and as an accent light. These trims come with adjustable lamp holders and have larger degrees of rotation resulting in both visual style and practical ergonomics.







**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Finish:** Die-Formed Construction Available in Black and Natural.

### COMPATIBILITY

 <a href="#">LH1499</a> STANDARD HOUSING	 <a href="#">LH1499IC</a> IC DOUBLE WALL HOUSING	 <a href="#">LH1499R</a> REMODEL HOUSING 120V/277V
 <a href="#">LSH1499</a> SHALLOW HOUSING	 <a href="#">LSH1499IC</a> SHALLOW IC HOUSING	 <a href="#">LSH1499R</a> SHALLOW REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LR1435N

LR1435	FINISH	ACCESSORIES
LR1435	<b>B</b> :Black	<b>/L38</b> :Clear Lens
	<b>N</b> :Natural	<b>/L40</b> :Yellow Lens
		<b>/L41</b> :Blue Lens
		<b>/L42</b> :Amber Lens
		<b>/L43</b> :Green Lens
		<b>/L44</b> :Daylight Blue Lens
		<b>/L48</b> :Lens with Internal Louver Filter
		<b>/L49</b> :Frosted Soft Focus
		<b>/L50UV</b> :UltraViolet Filter
		<b>/L53</b> :Micro - Prismatic Spread Lens
		<b>/L55</b> :Linear Spread Lens
	<b>/LL16B</b> :Black	
	<b>/LL16C</b> :Clear	

ID#: 211