


## LR1520 - ADJUSTABLE SPOT W/ BAFFLE

### 5" LOW VOLTAGE TRIMS



up to 35 degree rotation

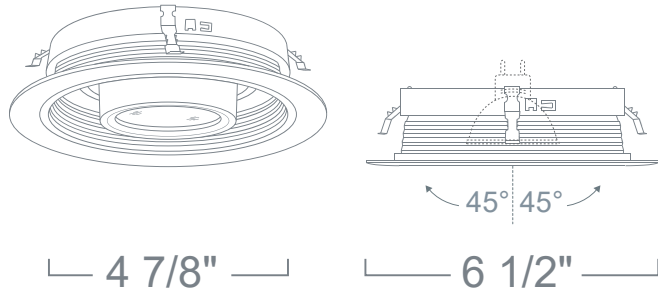

### SPECIFICATION

12V 75W Max MR16 GU5.3

**Application:** The MR16 adjustable trim combines the aiming capabilities of a small aperture trim while maintaining appearance of the 5" trim. These trims have a large degree of rotation that allows for pinpoint illumination in an accent lighting application. The MR16 lamp has a controlled beam spread that produces the level of light intensity needed to properly highlight an object.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Baffle Finish:** Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black and All Natural\*.

**Ring Finish:** Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Gold and Natural.

### COMPATIBILITY



[LH1599](#)

STANDARD HOUSING



[LH1599IC](#)

IC HOUSING

Note: Wattage limitations on compatible items must be met.

2023.04.19

### FEATURE:



ORDERING EXAMPLE : LR1520W

LR1520	BAFFLE FINISH	RING FINISH	ACCESSORIES
LR1520	<b>W</b> :White	<b>Blank</b> :White	<b>/L38</b> :Clear Lens
		<b>B</b> :Black	<b>/L40</b> :Yellow Lens
		<b>C</b> :Chrome	<b>/L41</b> :Blue Lens
		<b>G</b> :Gold	<b>/L42</b> :Amber Lens
		<b>N</b> :Natural	<b>/L43</b> :Green Lens
			<b>/L44</b> :Daylight Blue Lens
			<b>/L48</b> :Lens with Internal Louver Filter
			<b>/L49</b> :Frosted Soft Focus
			<b>/L50UV</b> :UltraViolet Filter
			<b>/L53</b> :Micro - Prismatic Spread Lens
			<b>/L55</b> :Linear Spread Lens
			<b>/LL16B</b> :Black
			<b>/LL16C</b> :Clear

ID#: 185