


LR4144 - CMH-MR16 NARROW APERTURE REFLECTOR 4" MINI-ARC - ARCHITECTURAL HID TRIMS

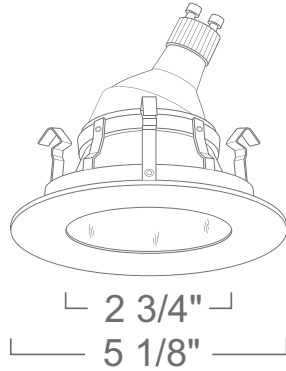

SPECIFICATION

HID 20W/39W CMH-MR16 GX10

Application: Architectural-grade recessed downlight reflector for low to medium height ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Regressed tempered glass lens allows for special control of light output. Protects lamp while reducing lamp image.

Socket: Pulse-Rated 4KV, porcelain Twist and Lock GX10 socket with high temperature leads and nickel-plated contacts.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Lamp Ordering: Ceramic Metal Halide lamp can be supplied with product packaging, use the following ordering codes:
 LLMMR16-20-SP: 20W Spot, LLMMR16-20-FL: 20W Flood
 LLMMR16-39-SP: 39W Spot, LLMMR16-39-FL: 39W Flood

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Reflector Finish: Available in White, Black, Clear and Satin Haze.

Ring Finish: Available in White, Black, All Natural, All Mocha and All Copper.

Label: cETL Listed

Limitation: Not for use w/Shallow Housings.

Assembled in USA

COMPATIBILITY



LHBM4

4" MINI-ARC REMODEL HOUSING



LHBM4

4" MINI-ARC HID HOUSING

Note: Wattage limitations on compatible items must be met.

2016.6.14

FEATURE:



ORDERING EXAMPLE : LR4144WW

LR4144	REFLECTOR FINISH	RING FINISH
LR4144	W :White	W :White
	B :Black	B :Black
	C :Clear	N :All Natural
	S :Satin Haze	MO :All Mocha
		CO :All Copper

ID#: 488