


LR643 - BAFFLE W/ GLASS ACCENT 6" HORIZONTAL COMPACT FLUORESCENT TRIMS



Integral emergency switch available. Consult factory for details

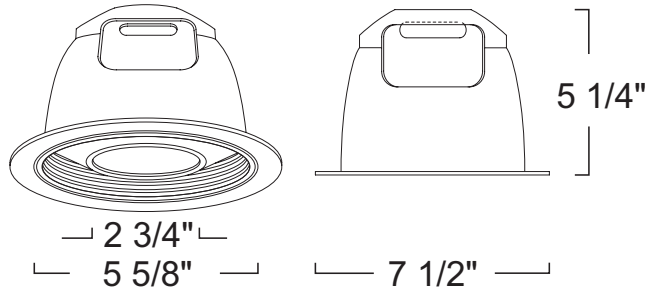

SPECIFICATION

CFL (2) 26W DTT
(1) 42W TTT

Application: Architectural-grade recessed downlight reflector for low to medium height ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Decorative glass accent brings style and elegance to any decor. Reduces lamp image while adding a subtle decorative element to architecture.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Baffle / Flange Finish: One piece low-iridescent aluminum spun reflector with seem less self-flanged ring and an integrally formed baffle in lower part of reflector to reduce glare and stray light Available in White Baffle/White Flange and Black Baffle/White Flange.

Glass: Quality tempered glass adds a decorative element Available in Amber, Blue and Frosted.

Label: UL Listed, cETL Listed

Assembled in USA

COMPATIBILITY

 LHRFL6 6" ARCHITECTURAL FIRE-RATED HOUSING (2-LAMP)	 LFH6R 6" REMODEL ARCHITECTURAL HOUSING (1-LAMP)	 LFH 6" LIGHT COMMERCIAL IC HOUSING (IC)
 LFH6R 6" REMODEL ARCHITECTURAL HOUSING (2-LAMP)	 LFH6 6" ARCHITECTURAL HOUSING (2-LAMP)	 LFH 6" LIGHT COMMERCIAL HOUSING (NON-IC)
 LFH6 6" ARCHITECTURAL HOUSING (1-LAMP)		

Note: Wattage limitations on compatible items must be met.

2016.6.14

FEATURE:



ORDERING EXAMPLE : LR643WWF-AM

LR643	BAFFLE / FLANGE FINISH	GLASS
LR643	WWF :White Baffle/White Flange	-AM :Amber
	BWF :Black Baffle/White Flange	-BL :Blue
		-FR :Frosted

ID#: 432