
TYPE CATALOG#

LR662 - REFLECTOR W/ LENS

6" HORIZONTAL COMPACT FLUORESCENT TRIMS



Integral emergency switch available. Consult factory for details

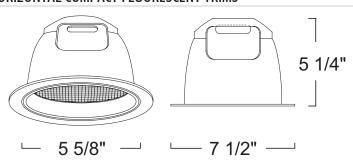

SPECIFICATION

CFL (2) 26W DTT (1) 42W TTT

Application: Architectural-grade recessed downlight reflector for low to medium height ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Regressed tempered glass lens allows for special control of light output. Protects lamp while reducing lamp image.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Suitable for Damp and Wet Location Installations.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.


Reflector / Flange Finish: One piece spun low-iridescent aluminum reflector with seem less self-flanged ring Available in Clear Reflector/Natural Flange, Clear Reflector/White Flange, White Reflector/White Flange, Clear Reflector/ Clear Flange, Satin Reflector/ Natural Flange and Satin Reflector/ White Flange.

 $\textbf{Lens Type:} \ \, \textbf{Tempered glass lens to protect lamp and control light output Available in Prismatic Lens, Albalite, Center-Frost TM, Clear and Frosted.}$

Label: UL Listed, cETL Listed

Assembled in USA

COMPATIBILITY



<u>LFH6</u>

6" ARCHITECTURAL Housing (1-lamp)

Note: Wattage limitations on compatible items must be met.

www.liton.com

FEATURE:

LR662

LR662







Tel: 323.904.0200



- -- --

REFLECTOR / FLANGE FINISH LENS TYPE :Clear Reflector/Natural Flange CNF **Blank**: Prismatic Lens :Clear Reflector/White Flange **CWF** :Albalite :Center-FrostTM **WWF** :White Reflector/White Flange -CF :Clear Reflector/ Clear Flange -CL CCF :Clear :Satin Reflector/ Natural Flange -FR :Frosted :Satin Reflector/ White Flange

ID#: 435



ORDERING EXAMPLE: LR662CCF-CF