


LR864 - BAFFLE W/ LENS 8" HORIZONTAL COMPACT FLUORESCENT TRIMS



Integral emergency switch available. Consult factory for details

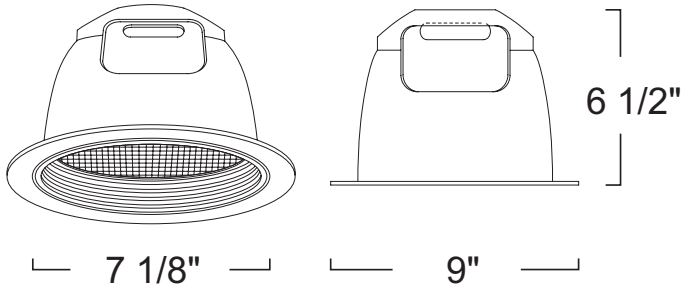

SPECIFICATION

CFL (2) 42W TTT
(2) 26W DTT

Application: Architectural-grade recessed downlight reflector for high ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Regressed tempered glass lens allows for special control of light output. Protects lamp while reducing lamp image.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Suitable for Damp and Wet Location Installations.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.







Baffle / Flange Finish: One piece low-iridescent aluminum spun reflector with seem less self-flanged ring and an integrally formed baffle in lower part of reflector to reduce glare and stray light Available in White Baffle/White Flange, Black Baffle/White Flange, Copper Baffle/Copper Flange and Mocha Baffle/Mocha Flange.

Glass: Quality tempered glass adds a decorative element Available in Prismatic Lens and Frosted.

Label: UL Listed, cETL Listed

Assembled in USA

COMPATIBILITY

 LF82 2-LAMP HOUSING	 LFH8 ARCHITECTURAL HOUSING (2-LAMP)	 LFH8 ARCHITECTURAL HOUSING (1-LAMP)
 LFH82 IC HOUSING (2-LAMP)	 LFH8R 8" REMODEL ARCHITECTURAL HOUSING (1-LAMP)	 LFH8R 8" REMODEL ARCHITECTURAL HOUSING (2-LAMP)

Note: Wattage limitations on compatible items must be met.

2016.6.14

FEATURE:



ORDERING EXAMPLE : LR864MOMOF-FR

LR864	BAFFLE / FLANGE FINISH	GLASS
LR864	WWF :White Baffle/White Flange	Blank :Prismatic Lens
	BWF :Black Baffle/White Flange	-FR :Frosted
	COCOF :Copper Baffle/Copper Flange	
	MOMOF :Mocha Baffle/Mocha Flange	

ID# : 460