



## LRLD649 - 6" REGRESSED DECO LED CONE 6" LED TRIMS (6 LED SERIES)

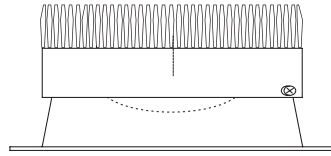

5 3/4"

7 3/8"

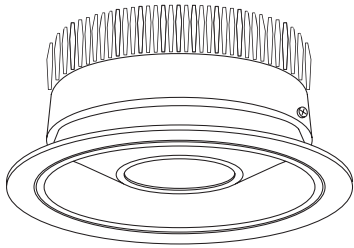

### SPECIFICATION

10W/15W LED

**Application:** This energy efficient LED trim is perfect for low to high height ceilings in residential and light commercial applications. Decorative glass trims add warmth and dimension to lighting designs. Each finish and glass color combination creates a unique atmosphere.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Power Connection:** LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

**Lumen Maintenance:** Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Thermal Management:** Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

**Color Temperature:** Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 2,700K, 3,500K & 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

**Finish:** Available in All Black, All White and Satin Reflector/ Natural Ring.





**Glass Color:** Available in Amber, Blue and Frosted.

**Color Temp:** Only available in 3000K.

**Label:** cETL Listed

**Assembled in USA**

### COMPATIBILITY

 <b>LHLD6</b> <b>6" LED HOUSING (10W/15W)</b>	 <b>LSHLD6R</b> <b>6" REMODEL SHALLOW HOUSING (9W/16W)</b>	 <b>LHLD6R</b> <b>6" IC REMODEL LED HOUSING (10W/15W)</b>
 <b>LSHLD6</b> <b>6" SHALLOW HOUSING (10W/15W)</b>		

Note: Wattage limitations on compatible items must be met.

#### Benefit:

- 10W delivers 450Lm, 15W delivers 650Lm
- Unique Frosted Glass Accent provides soft, ambient light
- Outperforms 50W MR16, PAR20, PAR30 or 75W A19 Lamps
- Available for Wet Locations
- Fits Shallow Housings

2016.6.14

### FEATURE:



ORDERING EXAMPLE : LRLD649W-BL

LRLD649	FINISH	GLASS COLOR	COLOR TEMP
<b>LRLD649</b>	<b>BB</b> :All Black	<b>-AM</b> :Amber	<b>Blank</b> :3000K
	<b>SN</b> :Satin Reflector/ Natural Ring	<b>-BL</b> :Blue	
	<b>W</b> :All White	<b>-FR</b> :Frosted	

ID#: 2136

