


LRM33 - METAL BAFFLE AIRTIGHT WITH GASKET

6" LINE VOLTAGE TRIMS

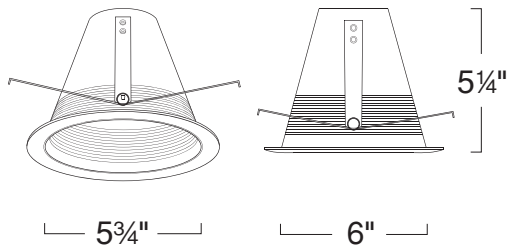

For Wet Location installation, must use Outdoor Rated PAR30 Lamp.

SPECIFICATION

120V 100W Max R30/PAR30/A19 MED E26

Application: Baffle downlights are used to minimize unwanted glare from the lamp source while providing a budget friendly design to provide general ambient light to an environment.

While the low reflectance level of black makes it the most effective color for baffle trims, white baffles have become the most popular option. The benefit of white baffles is that the trims blend with the ceiling when the lights are turned off. They are suitable for general illumination of residential and light commercial ceilings up to 9 feet. For a room with a typical eight-foot high ceiling, space 6" downlights apart approximately seven feet apart for general lighting applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Conceals view into housing. Only available in White Baffle/ White Ring.

Label: UL Listed, cETL Listed

Limitation: Not for use w/Shallow Housings.

COMPATIBILITY



LH7

STANDARD E26 HOUSING



LH7IC

100W IC E26 HOUSING



LH7R

REMODEL E26 HOUSING

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LRM33W-WL

| LRM33 | BAFFLE FINISH | RATING |
|-------|-----------------------------|---|
| LRM33 | W :White Baffle/ White Ring | Blank :Damp Location -WL :Wet Location |

ID# : 35