


LRQ1493 - SQUARE RING BAFFLE

4" LOW VOLTAGE TRIMS

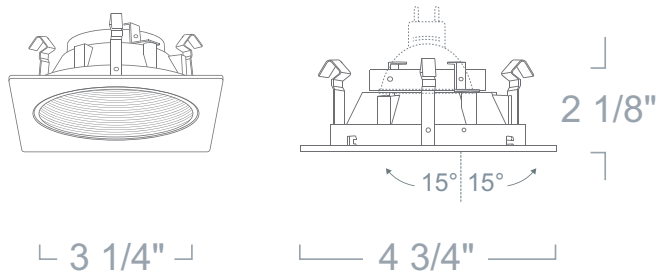

Not for use with Remodel Housings.

SPECIFICATION

12V 75W Max MR16 GU5.3

Application: Simple, functional and decorative luminaire perfect for today's ever changing interiors, modern and traditional alike. Can be easily installed into an existing 4" round aperture housing, allowing for an adjustable and perfect trim alignment.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.






Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural*, All Copper* and All Mocha*.

Square Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Natural, Copper and Mocha.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LH1499	 LH1499IC	 LH1499R
STANDARD HOUSING	IC DOUBLE WALL HOUSING	REMODEL HOUSING 120V/277V
 LSH1499	 LSH1499IC	
SHALLOW HOUSING	SHALLOW IC HOUSING	

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LRQ1493MOC

LRQ1493	BAFFLE FINISH	SQUARE RING FINISH	ACCESSORIES
LRQ1493	W :White	Blank :White	/L38 :Clear Lens
	B :Black	B :Black	/L40 :Yellow Lens
	N :All Natural*	C :Chrome	/L41 :Blue Lens
	CO :All Copper*	N :Natural	/L42 :Amber Lens
	MO :All Mocha*	CO :Copper	/L43 :Green Lens
		MO :Mocha	/L44 :Daylight Blue Lens
			/L48 :Lens with Internal Louver Filter
			/L49 :Frosted Soft Focus
			/L50UV :UltraViolet Filter
			/L53 :Micro - Prismatic Spread Lens
			/L55 :Linear Spread Lens
			/LL16B :Black
			/LL16C :Clear

* Comes standard with a matching ring finish. Use "W" for White Ring.

ID#: 243