


LRSQ1419J - FULLY ADJUSTABLE SQUARE TRIM

4" LOW VOLTAGE TRIMS

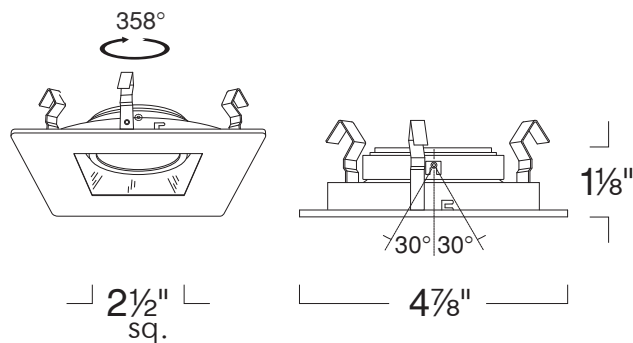

SPECIFICATION

12V 75W Max MR16 GU10

Application: Modern Square Aperture Trim is super adjustable and designed for retail, commercial and residential applications. Square trim ring can be rotated 360 degrees after installation.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.






Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Finish: Seamless one piece square trim. Available in Black Reflector/Black Ring, Black Reflector/White Ring and White Reflector/White Ring.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LH1499	 LH1499IC	 LH1499R
STANDARD HOUSING	IC DOUBLE WALL HOUSING	REMODEL HOUSING 120V/277V
 LSH1499IC	 LH99RA-GU10	
SHALLOW IC HOUSING	REMODEL HOUSING	

Note: Wattage limitations on compatible items must be met.

Benefit:

- Modern 'Square-in-Square' Design
- Super-Adjustable Lamp Holder allows easy repositioning of the beam.
- Square Trim Ring can be rotated 360° after installation
- Square design fits round aperture housing

FEATURE:



ORDERING EXAMPLE : LRSQ1419JWW/L38-WL

LRSQ1419J	FINISH	ACCESSORIES	OPTIONS
LRSQ1419J	BB :Black Reflector/Black Ring	/L38 :Clear Lens	Blank :Damp
	BW :Black Reflector/White Ring	/L40 :Yellow Lens	-WL :Wet Location
	WW :White Reflector/White Ring	/L41 :Blue Lens	
		/L42 :Amber Lens	
		/L43 :Green Lens	
		/L48 :Lens with Internal Louver Filter	
		/L49 :Frosted Soft Focus	
		/L50UV :UltraViolet Filter	
		/L53 :Micro - Prismatic Spread Lens	
		/L55 :Linear Spread Lens	
		/LL16B :Black	
		/LL16C :Clear	

ID#: 2674