


## LSH1499RE - SHALLOW REMODEL HOUSING

### 4" LOW VOLTAGE HOUSINGS

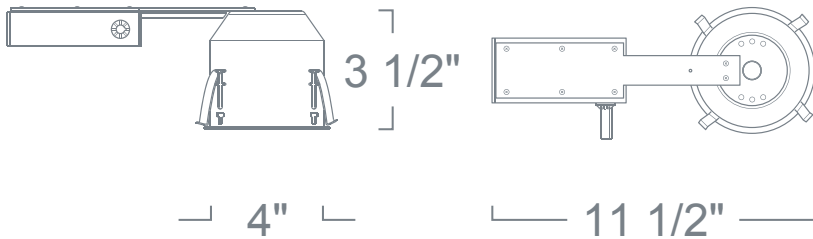

### SPECIFICATION

12V Out 37W Max MR16

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Transformer:** Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non-IC rated housing must be kept 3" from insulation.

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No. 12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

### COMPATIBILITY

 <a href="#">LFB2012</a> <b>FIRE BARRIER</b>	 <a href="#">LR1481</a> <b>PULL DOWN W/ REFLECTOR</b>	 <a href="#">LR1493</a> <b>METAL BAFFLE</b>
 <a href="#">LR1423</a> <b>FROSTED GLASS DOME</b>	 <a href="#">LR1424</a> <b>SHOWER DECO GLASS (FROSTED RING)</b>	 <a href="#">LR1443</a> <b>PINHOLE W/ BAFFLE</b>
 <a href="#">LR1445</a> <b>WALL WASH REFLECTOR EYELID</b>	 <a href="#">LR1461</a> <b>PINHOLE W/ REFLECTOR</b>	 <a href="#">LR1495</a> <b>WALL WASH BAFFLE</b>
 <a href="#">LR1498</a> <b>EYEBALL</b>	 <a href="#">LR1409</a> <b>ADJUSTABLE GIMBAL</b>	 <a href="#">LR1467</a> <b>ADJUSTABLE PULL DOWN</b>
 <a href="#">LR1468</a> <b>MULTI ACCESSORY PULL DOWN</b>	 <a href="#">LR1435</a> <b>ADJUSTABLE SPOT</b>	 <a href="#">LR1466</a> <b>ADJUSTABLE GIMBAL</b>

Please see website for more compatible items.

### FEATURE:



ORDERING EXAMPLE : LSH1499RE

LSH1499RE	RATING	WATTAGE	VOLTAGE	ACCESSORIES
LSH1499RE	Blank: Electronic	Blank :37W	Blank : 120V -27 :277V (Electronic*)	/LBLE20 :20W Derating /LBLE35 :35W Derating

\* Available with 120V/277V Magnetic Option, consult factory.