

## LT81 : ARCHLITE


### LINE VOLTAGE TRACK LUMINAIRES




• Precision design ensures firm positioning



• Durable high quality powder coat paint

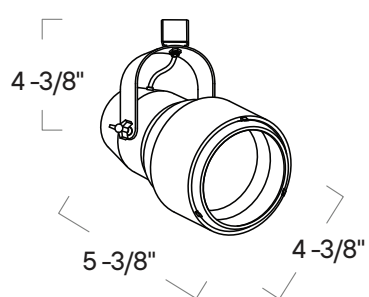

LT815

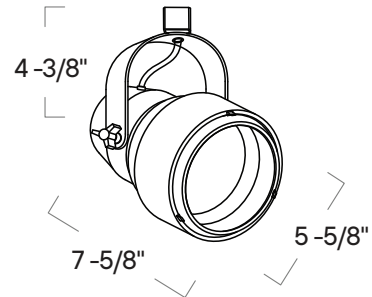









LT816

### ORDERING : LT815B

Fixture		Finish	
Archlite 30 (75W) PAR30	<b>LT815</b>	White	<b>W</b>
Archlite 38 (250W) PAR38	<b>LT816</b>	Black	<b>B<sup>1</sup></b>

<sup>1</sup> Not available for LT816.

### COMPATIBLE ITEMS

<p><b>LP913F</b> Line voltage ground canopy</p> 	<p><b>LP971</b> Line voltage square canopy</p> 	<p><b>PT57</b> Plug-in clamp adapter</p> 	<p><b>PT58</b> Line voltage clamp adapter</p> 	<p><b>LP</b> 1 CCT track channel</p> 	<p><b>LP20</b> Recessed track</p> 	<p><b>LPC</b> 2 CCT Track channel</p> 	<p><b>LP944</b> Barndoor Shutters &amp; Accessory holder (For LT816 only)</p> 
---	--	--	---	--	---	---	---

**SPECIFICATION****Application**

---

Very popular in high-end residential and retail environments. These professional grade track fixtures are fully adjustable and their position locking knobs and front-loading designs make them a perfect fit for the most demanding applications. Durable high quality powder coat paint ensures long life with little color fatigue over the years.

**Mounting:**

Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

**Lumen Maintenance:**

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Aiming Mechanism:**

High strength steel mounting yoke to provide full lateral and vertical aiming. Dual triangular plastic tightening knobs rigidly maintain aiming angle.

**Electrical Components**

---

**Thermal Management:**

Effective thermal dissipation facilitated by integral aluminum heat sink for maximum heat rejection to provide long LED life.

**Finishes**

---

High heat rated baked enamel Available in White and Black. Custom finishes available with extended lead times – consult factory.

**Socket**

---

Standard porcelain medium screw base socket with high temperature leads.

**Certifications and Listings**

---

UL listed.

**Caution**

---

Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

**Warranty**

---

Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C (95°F), installations exceeding this temperature will result in reduced LED lamp life and avoided warranty.