


## PRO-STICK PROFESSIONAL GRADE LED STICK LIGHT

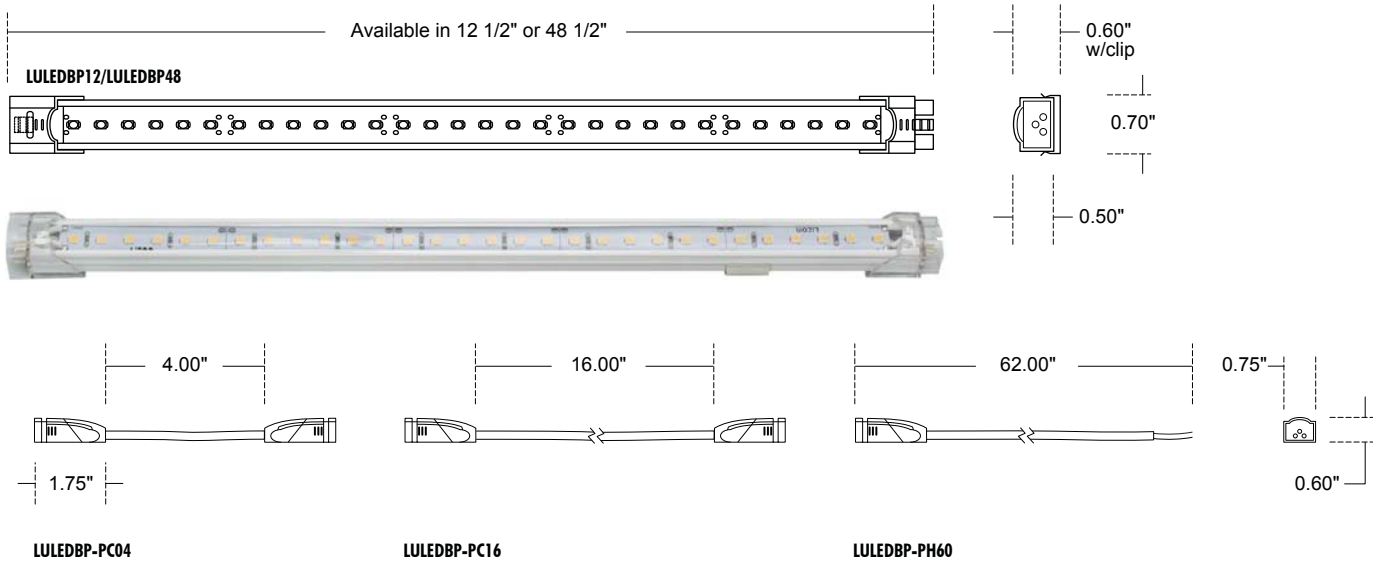

### SPECIFICATION 24V - 5.5 Watts per Foot

**Application:** Accent lighting of coves, kick spaces, inside and under cabinets, recreational vehicles, wine racks and other high power linear lighting application.

**Description:** A high power modular LED lighting system. High density LEDs populated onto a flexible metallic LED base. Excellent for small spaces that need a nice soft illumination in a low profile design.

**Mounting:** Mounting clips and hardware included in package. 0° bracket and mounting hardware included.

- Lamp Life:**
- 50,000 hours of life with 70% of initial lumens.
- LED Color Temperature:**
- 3000K Warm White or 4000K Neutral White.
- Optional LED Colors:**
- Blue, Green, Amber and Red and RGB are special order. Extended lead times may apply.
- LED Lamp Distribution:**
- Standard 120-degree.
- Listing:**
- ETL Listed as a Class 2 LED system.

**Technical:** Operating Temperature: -4°F - 122°F.  
Max. Ambient Temperature: 95°F (30°C).  
20' run per power feed.

**Warranty:** 3 Year Warranty.

#### Benefits:

- Professional Quality & Performance.
- Robust Keyed Connection System prevents polarity issues.
- Clear Polycarbonate Cover for easy cleaning and protection.
- 85 CRI for better color rendering.
- Powerful 450 lm/foot.
- High Density 30 LED/ft Board.
- No dark spots with end-to-end pre-installed connections.
- Versatile ELV & 0-10V Dimmable and 277V Driver Options.
- Meets Title24 Residential Standards. JA8 Listed

### ORDERING

Catalog #	Length	LED Color	LED Qty.	Wattage	Lumens
LULEDBP12	12"	-30: 3000K	30 LED	5.5W	450 lumens
LULEDBP48	48"	-40: 4000K	120 LED	22W	1800 lumens

Power Supplies	Watt.	Dimming	Power Method	Listing	Dimensions	Accessories	Description	Length
LD5V24-24-PI	24W	N/A	AC Plug-in <sup>2</sup>	ETL	3.82" x 2.16" x 1.54"	LULEDB-BR30	30° Clip	
LD529V024-10	10W	N/A	Hardwire <sup>1,2</sup>	UL Recognized	5.00" x 5.00" x 1.00"	LULEDBP-PC04	4" Inter Connector	4"
LD533V024-60-DLV-JB	60W	Electronic Low Volt.	Hardwire <sup>1,2</sup>	ETL	8.19" x 2.06" x 1.75"	LULEDBP-PC16	16" Inter Connector	16"
LD533V024-96-DLV-JB	96W	Electronic Low Volt.	Hardwire <sup>1,2</sup>	ETL	9.25" x 3.44" x 1.94"	LULEDBP-PH60	60" End Feed Connector	60"
LD533V024-200-DLV-JB	200W	Electronic Low Volt.	Hardwire <sup>1,2</sup>	ETL	9.25" x 3.44" x 1.94"	LULEDB-FC48	Frosted Cover	48"
LD533V024-1227-60-D10	60W	0-10V	Hardwire <sup>1,2</sup>	UL Recognized	8.38" x 1.69" x 1.19"			
LD533V024-1227-100-D10	100W	0-10V	Hardwire <sup>1,2</sup>	UL Recognized	8.31" x 2.38" x 1.38"			

<sup>1</sup> add -PI for US Wall Plug

<sup>2</sup> requires LULEDBP-PH60