


LINKALED BAR - WET LOCATION MODULAR LED LIGHTING SYSTEM

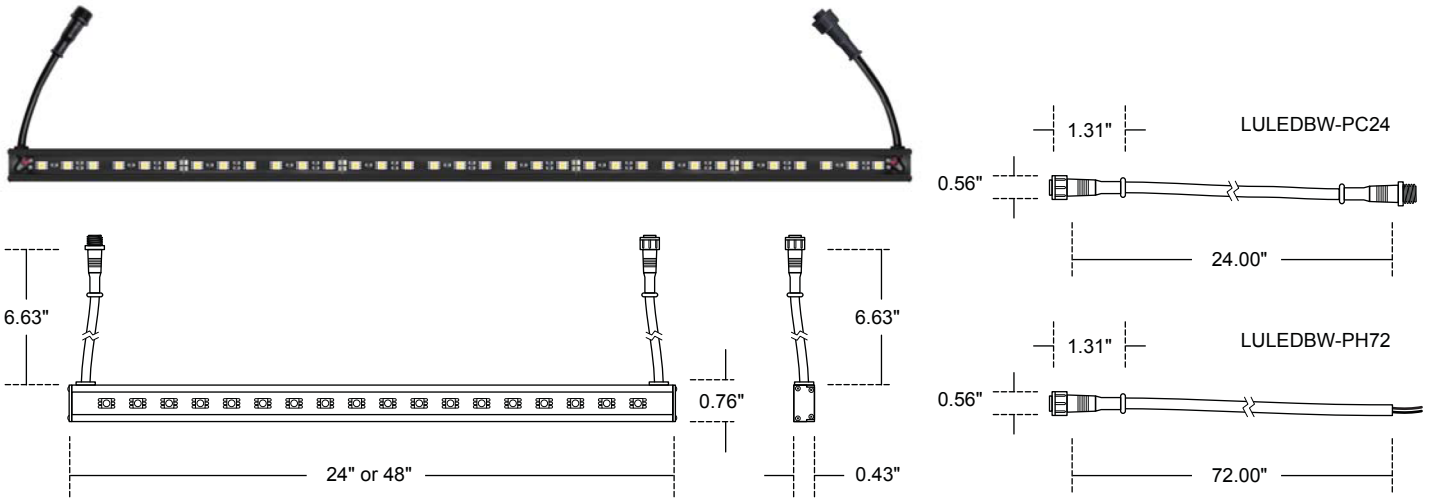

SPECIFICATION 24V - 5 Watts per Foot

Application: Wet location Linkaled Bar is perfect for installation in damp or wet locations such as kitchens, baths, wet bars, spas and covered outdoor spaces.

Description: A high power modular LED lighting system. High density LEDs populated onto a metallic LED base. Excellent for small wet or damp spaces that need a nice soft illumination in a low profile design.

Mounting: Mounting clips and hardware included in package.

- Lamp Life:** • 25,000 hours of life with 70% of initial lumens.
- LED Color Temperature:** • 3,000K Warm White.
- Optional LED Colors:** • Blue, Green, Amber and Red and RGB are special order. Extended lead times may apply.
- LED Lamp Distribution:** • Standard 120-degree.
- Listing:** • ETL/CETL Listed as a Class 2 LED system. IP66


Certification: This LED product is certified as compliant with California's Title 24 Energy Code by the California Energy Commission.

Features:

- 0° bracket and mounting hardware included.
- Operating Temperature: -4°F - 122°F
- Max. Ambient Temperature: 95°F (30°C).
- Dimming: Electronic low voltage and 0-10V option.
- Coupler included. Easy to install for end to end connections.
- No dark spots with onboard connectors.
- Seamless runs with in-line power feed.
- Long 20' Runs. Plug and play.
- Modular: No soldering or flimsy connectors.
- 2 year warranty.

Rating: 100W Max., Single run

ZONAL LUMEN SUMMARY LULEDBW24-30

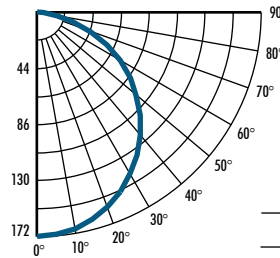

Zone	Lumens	% Fixt
0 - 30	132.96	28.80
0 - 40	217.52	47.10
0 - 60	384.36	83.30
0 - 90	461.40	100.00

FOOT CANDLE

Distance	Width	FC
1'	2.0'	30
2'	2.5'	15
3'	3.5'	7.5
4'	4.0'	4.95

ORDERING

Catalog #	Length	LED Qty.	LED Color	Wattage	Lumens
LULEDBW24	24"	36 LED	-30: 3000K	9W	540 lumens
LULEDBW48	48"	72 LED		18W	1080 lumens

Power Supplies	Watt.	Dimming	Power Method	Listing	Dimensions
LD5V24-24-PI	24W	N/A	AC Plug-in ²	ETL	3.82" x 2.16" x 1.54"
LD529V024-10	10W	N/A	Hardwire ^{1,2}	UL	5.00" x 5.00" x 1.00"
LD533V024-60-DLV-JB	60W	Electronic Low Volt.	Hardwire ^{1,2,3}	ETL	8.19" x 2.06" x 1.75"
LD533V024-96-DLV-JB	96W	Electronic Low Volt.	Hardwire ^{1,2,3}	ETL	9.25" x 3.44" x 1.94"
LD533V024-1227-60-D10	60W	0-10V	Hardwire ^{1,2}	UL	8.38" x 1.69" x 1.19"
LD533V024-1227-100-D10	100W	0-10V	Hardwire ^{1,2}	UL	8.31" x 2.38" x 1.38"

Accessories	Description	Length
LULEDB-BR30	30° Clip	
LULEDB-CC48	Clear Cover	48"
LULEDB-FC48	Frosted Cover	48"
LULEDBW-PC24	Inter-Power Connector	24"
LULEDBW-PH72	End Feed Connector	72"

¹ add -PI for US Wall Plug ² requires LUTKLED-PH40 ³ 277V option

2014.07.28

