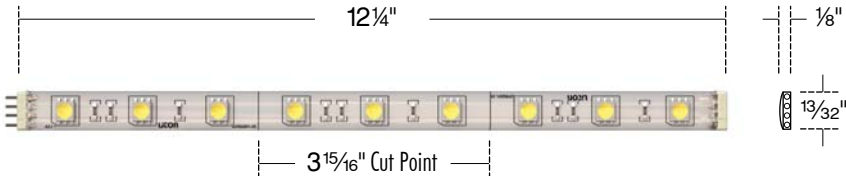


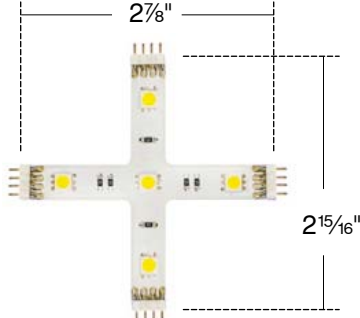


LINKALED: LUTKLED FLEXIBLE TAPE LED LIGHTING SYSTEM



SHAPES

LUTKLED1-XX															
		<div>Strip Light</div> <div>Flexible and modular LED tape lighting system. Highly durable 3M brand adhesive tape on back for easy installation.</div> <table><tr><td>POWER CONSUMPTION</td><td>2.4W</td></tr><tr><td>LUMENS</td><td>100-130</td></tr><tr><td>CUTTABLE?</td><td>YES</td></tr></table>		POWER CONSUMPTION	2.4W	LUMENS	100-130	CUTTABLE?	YES						
POWER CONSUMPTION	2.4W														
LUMENS	100-130														
CUTTABLE?	YES														
LUTKLEDL-XX		LUTKLEDT-XX													
															
<div>L-Shape Strip Light</div> <div>L-shape flexible and modular LED tape lighting system. Highly durable 3M brand adhesive tape on back for easy installation.</div> <table><tr><td>POWER CONSUMPTION</td><td>0.75W</td></tr><tr><td>LUMENS</td><td>34</td></tr><tr><td>CUTTABLE?</td><td>NO</td></tr></table>		POWER CONSUMPTION	0.75W	LUMENS	34	CUTTABLE?	NO	<div>T-Shape Strip Light</div> <div>T-shape flexible and modular LED tape lighting system. Highly durable 3M brand adhesive tape on back for easy installation.</div> <table><tr><td>POWER CONSUMPTION</td><td>1.0W</td></tr><tr><td>LUMENS</td><td>46</td></tr><tr><td>CUTTABLE?</td><td>NO</td></tr></table>		POWER CONSUMPTION	1.0W	LUMENS	46	CUTTABLE?	NO
POWER CONSUMPTION	0.75W														
LUMENS	34														
CUTTABLE?	NO														
POWER CONSUMPTION	1.0W														
LUMENS	46														
CUTTABLE?	NO														
		LUTKLEDX-XX													
															
		<div>X-Shape Strip Light</div> <div>X-shape flexible and modular LED tape lighting system. Highly durable 3M brand adhesive tape on back for easy installation.</div> <table><tr><td>POWER CONSUMPTION</td><td>1.4W</td></tr><tr><td>LUMENS</td><td>57</td></tr><tr><td>CUTTABLE?</td><td>NO</td></tr></table>		POWER CONSUMPTION	1.4W	LUMENS	57	CUTTABLE?	NO						
POWER CONSUMPTION	1.4W														
LUMENS	57														
CUTTABLE?	NO														

SPECIFICATIONS

APPLICATIONS:	Accent lighting for coves, kick spaces, inside and under cabinets, recreation vehicles, wine racks and other soft linear applications.
DESCRIPTION:	A flexible and modular LED tape lighting system. High quality silicone covered LEDs populated onto a flexible metallic 3/8" wide by 1/8" deep tape like product with a self adhesive back for easy installation. Excellent for small spaces that need a nice soft illumination.
MOUNTING:	Highly durable 3M brand adhesive tape on back side of LED strip.
STANDARD PACKAGING:	Comes pre-connected with ten pieces of LUTKLED1 in a roll.
COLOR TEMPERATURE:	Available in 2,700K, 3,500K and 4,000K
LAMP LIFE	• 35,000 hours of life with 70% of initial lumens.
OPTIONAL LED COLORS	• Blue, Green, Amber, Red and RGB are special order.
LED LAMP DISTRIBUTION LISTING	• Standard 120-degree.
USAGE	• ETL Listed as a Class 2 LED system for dry locations. For wet locations, use silicone gel to encapsulate connectors. • For use in applications with less than 12 hours average daily usage.

FEATURES

- No dark spots in corners using modular L, T and X connectors.
- Unlimited seamless runs with in-line power feed.
- Flexible: Can go around very tight curves and corners.
- Operating Temp: -4°F - 122°F.
- Modular: No soldering or flimsy connectors. Plug and Play.
- Protective Silicone Cover: prevents rust or chemical reactions with cleaners.
- 2 year warranty.
- Max. Ambient Temp: 95°F (30°C).
- 15ft. max. per run.







ORDERING

Example: LUTKLEDL-30

CATALOG#	COLOR TEMPERATURE		DESCRIPTION
LUTKLED1	-27:	2,700K	Strip Light
LUTKLEDL	-30:	3,500K	L-Shape Strip Light
LUTKLEDT	-40:	4,000K	T-Shape Strip Light
LUTKLEDX			X-Shape Strip Light

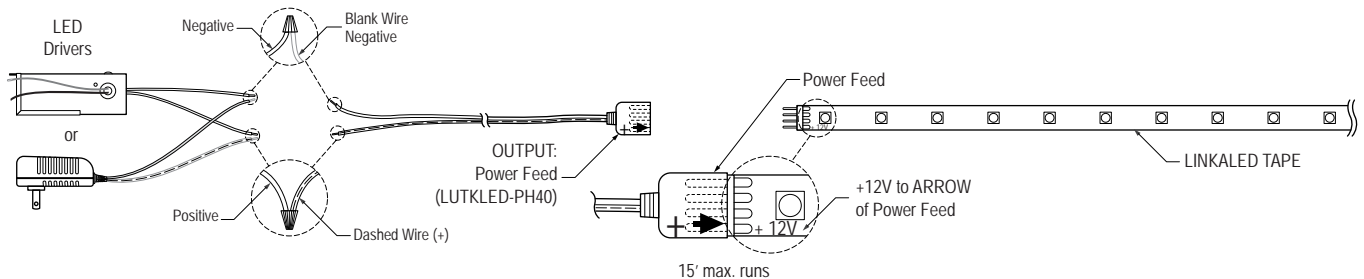
ACCESSORIES

INTER-CONNECTORS / POWER FEEDS - 60W MAX.

	LULEDB-T-4 3-Way Inter Connector 3-Way flexible inter-connector connects up to 3 sections of LinkaLED Bar or LinkaLED Tape connects 1 power feed and up to two (2) -24V LinkaLED products. 60W max. input.		LUTKLED-PH40 End Feed Connector Connects LinkaLED product to driver. LinkaLED 4-Pin connector at one end, stripped wires at the other. 60W max. input.
	LULEDB-PC3 1-Into-3 Power Connector 1 into 3 flexible power feed connects one power feed to 3 LinkaLED Pucks or up to 3 sections of LinkaLED Bar or LinkaLED Tape. 60W max.		LUTKLED-PC04/LUTKLED-PC16 Power Inter-Connect 4" or 16" Inter-connector with LinkaLED 4-Pin connector at both ends. For linking 2 LinkaLED products. 60W max. input.
	LULEDB-PX8 8-Port Power Hub 8 port power distribution hub. Connects 1 power feed up to 8 LinkaLED products or product runs. 60W max. input.		LUTKLED-WLS Wet Location Gel Wet location gel for water-resistant connections between LinkaLED tape sections. Must be applied at all connection points.

INSTALLATION

INSTRUCTIONS FOR LINKALED TAPE



POWER SUPPLIES

AC PLUG-IN / HARDWIRE DRIVERS

CATALOG#	WATTAGE	VOLTAGE	DIMMING	POWER METHOD	LISTING	DIMENSIONS
LUTKLED-36V12	36W	120V	4-Step w/DM50 Module	AC Plug-in	UL	3.82" x 2.16" x 1.54"
LD529V012-10	10W	120V	None	Hardwire ^{1,3}	UR	6.50" x 2.62" x 2.25"
LD533V012-60	60W	90V-265V	None	Hardwire ^{1,3}	UL	3.75" x 1.61" x 1.00"
LD533V012-60-DLV-JB	60W	120V	Electronic Low Voltage	Hardwire ^{1,3}	ETL	8.19" x 2.06" x 0.75"

¹ add -PI for US Wall Plug

² not to be used for non-dimming location

³ requires LUTKLED-PH40

NOTE: All drivers are rated for dry locations. Installer must supply NEMA box for damp and wet locations.